NEW CONSTRUCTION

BURGUNDY ST

These plans have been prepared by me or under my direct supervision. This project will not be built under my supervision.

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

COVER

2023.26

G001

1/12/2025 10:53:59 PM

GENERAL NOTES:

DESIGN CRITERIA - INTERNATIONAL RESIDENTIAL BUILDING CODE [IRC] 2021 EDITION

DESIGN WIND SPEED - 140 MPH EXPOSURE CATEGORY 'B'

[FRAMING AND FASTENERS SHALL COMPLY WITH AMERICAN FOREST AND PAPER ASSOCIATION [AF & PA] WOOD FRAME CONSTRUCTION MANUAL FOR ONE AND TOW FAMILY DWELLINGS [WFCM]

GENERAL FRAMING NOTES:

1. ALL WOOD FRAMING, FABRICATION AND ERECTION SHALL CONFORM TO THE NATIONAL DESIGN SPECIFICAITION FOR WOOD CONSTRUCTION WFCM / SSTD-10 THE PLYWOOD DESIGN SPCIFICATION BY THE APA AND MEET THE REQUIREMENTS BELOW. UNLESS OTHERWISE NOTED, ALL WOOD CONNECTIONS SHALL BE IN ACCORDANCE WITH THE 2009 RESIDENCIAL BUILDING CODE FOR 130 MPH WIND SPEED.

ALL LUMBER IN CONTACT WITH CONCRETE OR MASONRY SHALL BE TREATED.

ALL FRAMING LUMBER SHALL BE SOUTHERN YELLOW PINE, S4S NO.2 MAXIMUM MOISTURE CONTENT 15%, STUD WALLS AND PARTITIONS SHALL BE SIZED AS FOLLOWS:

2. EXTERIOR WALL 2X4 STUDS @ 16" O.C. / 2X6 STUDS @16" O.C. @ WALLS >10'
FIRST FLOOR PARTITIONS 2X4 STUDS @ 16"O.C. / 2X6 STUDS @ 16" O.C. @ WALLS > 10'
SECOND FLOOR PARTITIONS 2X4 STUDS @ 16" O.C. / 2X6 STUDS @ 16" O.C. @ WALLS > 10'
WET WALLS 2X6 STUDS @ 16" O.C.

3. BLOCK ALL STUDS AT MID-HEIGHT

4. FLOOR, ATTIC, AND ROOF FRAMING SHALL BE OF SIZES AS INDICATED ON FRAMING PLANS. PROVIDE WOOD CROSS BRIDGING WHERE INDICATED ON DRAWINGS OR WHEN JOIST SPANS EXCEED EIGHT [8] FEET. LOCATED [3] 2X12 BEAMS BELOW BEARING WALLS OF FLOOR ABOVE AND/ OR AS INDICATED ON FRAMING PLANS. BEAMS SHALL BEAR ON ENTIRE WIDTH OF BEARING TOP PLATES. LOCATE THREE [3] STUDS AT BEAM BEARING POINTS BELOW BOUBLE TOP PLATE OR AS SHOWN ON PLANS [SEE FRAMING NOTE #14] PROVIDE WOOD COLLAR BRACES AT 48" O.C. ROOF RAFTERS 24" BELOW CROWN OF ROOF.

5. PLYWOOD SUB-FLOOR APA RATED 48/24, 3/4" THICK TOUNGE AND GROOVE. GLUED AND NAILED TO FLOOR JOISTS WITH 8D NAILS SPACED AT 6" O.C. AT PANEL EDGES AND 12 " O.C. AT INTERMEDIATE SUPPORTS. [TYPICAL FOR 2 STORY HOME ONLY.]

6. PLYWOOD ROOFING - APA 24/0, 5/8" THICK NAIL WITH 8D NAIL SPACED AT 6" O.C. AT PANEL EDGES AND 12" O.C. AT INTERMIDIATED SUPPORTED. PROVIDE PLY CLIPS AT UNSUPPORTED EDGES BETWEEN ROOF JOIST. NAIL SHINGLES WITH 6 NAILS PER SHINGLE.

7. WIND BRACING - PROVIDE APA RATED 1/2" STORMGUARD O.S.B. BY NORBORD. NAIL EDGES WITH 8D NAIL AT 4" O.C. AT PANEL EDGES AND 12" O.C. AT INTERMEDIATE SUPPORTS. PROVIDE SOLID BLOCKING AT ALL PANELS.

8. COORDINATE FRAMING WITH HVAC, ELECTRICAL, AND PLUMBING REQUIREMENTS.

9. CEILING HEIGHTS:
FIRST FLOOR SEE ARCH DRAWINGS
SECOND FLOOR SEE ARCH DRAWINGS

10. JOIST HANGERS SHALL BE 16 GAUGE TYPE 'U' AS MANUFACTURED BY SIMPSON STRONG TIE CO. INSTALL JOIST HANGERS IN STRICK ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. USE JOIST HANGERS FOR BEAMS AND JOISTS WHICH FRAME TO BEAMS AT THE SAME ELEVATION. JOIST HANGERS SHALL BE THE SAME SIZE AS MEMBER SUPPORTED.

11. OPENING HEADER SCHEDULE:
FIRST FLOOR 2 2X12'S
SECOND FLOOR (2) 2X10 @ 3'-0" TO 6'-0" OPENINGS
(2) 2X6'S @ OPENINGS LESS THE 3'-0"

12. BORE HOLES 2" CLEAR FROM TOP TO BOTTOM EDGE OF JOIST, NOT LARGER THAN 1 1/4" IN DIA AND NOT IM MIDDLE OF SPAN.

13. STRAP ALL PLATES CUT AWAY FOR PLUMBING WITH 1 1/2" WIDE NO. 24 GUAGE GALV. STRAPS 18" LONG, BOTH SIDES OF WALL - SPIKED TO PLATES.

14. PROVIDE STUD POSTS MADE UP OF MULTIPULE STUDS BENEATH END BEARING OF BEAMS AS SHOWN ON FRAMING PLAN. NIAL EACH STUD TO ADJACENT STUD IN POST WITH 16D NAILS AT 12 IN O.C. [ON STUD CENTER LINE] AND WITHIN 3" OF EACH END. CUT STUDS CAREFULLY TO INSURE FULL AND COMPLETE BEARING TOP TO BOTTOM.

15. BRICK LINTELS ABOVE OPENINGS SHALL BE 5"X3 1/2" X 1/4" GLAV. STEEL ANGLES WITH 8" MIN. BEARING EACH SIDE UNLESS NOTED OR DETAILED OTHERWISE ON THE DRAWINGS.

16. ALL WINDOWS AND GLAZED OPENINGS SHALL BE PROVIDED WITH ANCHORABLE PRE-CUT, NUMBERED, 5/8" PLYWOOD STORM COVERS AND ATTACHMENT HARDWARE.

17. PROVIDE HURRICANE STRAPS BETWEEN WALL FRAMING AND BASE PLATE AND BETWEEN WALL FRAMING TOP PLATE AND ROOF FRAMING FOR CONTINUOUS LOAD PATH CONNECTION.

18. PROVIDE SIMPSON COLUMN CAPS TO CONNECT EXTERIOR COLUMNS TO ROOF BEAMS AND SIMPSON POST BASES [OR APPROVED EQUAL] TO CONNECT EXTERIOR COLUMNS TO FOUNDATION.

GENERAL	
G001	COVER
G002	INFORMATION
G003	SURVEY
G004	BENCHMARK
G005	AREA PLANS + SCHEDULE

ARCHITECTURAL	
A050	SITE PLAN
A051	COLUMN CONNECTION
A052	STAIR ELEVATIONS ONE
A053	STAIR ELEVATIONS TWO
A101	FLOOR PLANS
A121	ROOF PLAN
A201	EXTERIOR ELEVATIONS
A202	EXTERIOR ELEVATIONS
A203	EXTERIOR GATE ELEVATIONS
A301	BUILDING SECTIONS
A351	WALL SECTIONS
A352	WALL SECTIONS
A353	DETAILS - ENLARGED
A801	KITCHEN DETAILS
A802	WINDOW & DOOR DETAILS
A803	WINDOW & DOOR - ENLARGED
A804	KITCHEN 3D VIEWS
A901	3D VIEWS - EXTERIOR

STRUCTURAL	
P101	PLUMBING DIAGRAM
S101	GRADE BEAM & PILE PLAN
S102	CMU PLAN
S103	SILL PLAN
S121	FRAMING PLANS - LEVEL ONE
S122	FRAMING PLANS - LEVEL TWO
S123	FRAMING PLAN - CEILING

ELECTRICAL	
E101	ELECTRICAL PLAN

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

INFORMATION

2023.26

G002

1/12/2025 10:54:00 PM

BOUNDARY SURVEY OF
PART OF LOT 6
SQUARE 281
THIRD DISTRICT
ORLEANS PARISH, LA

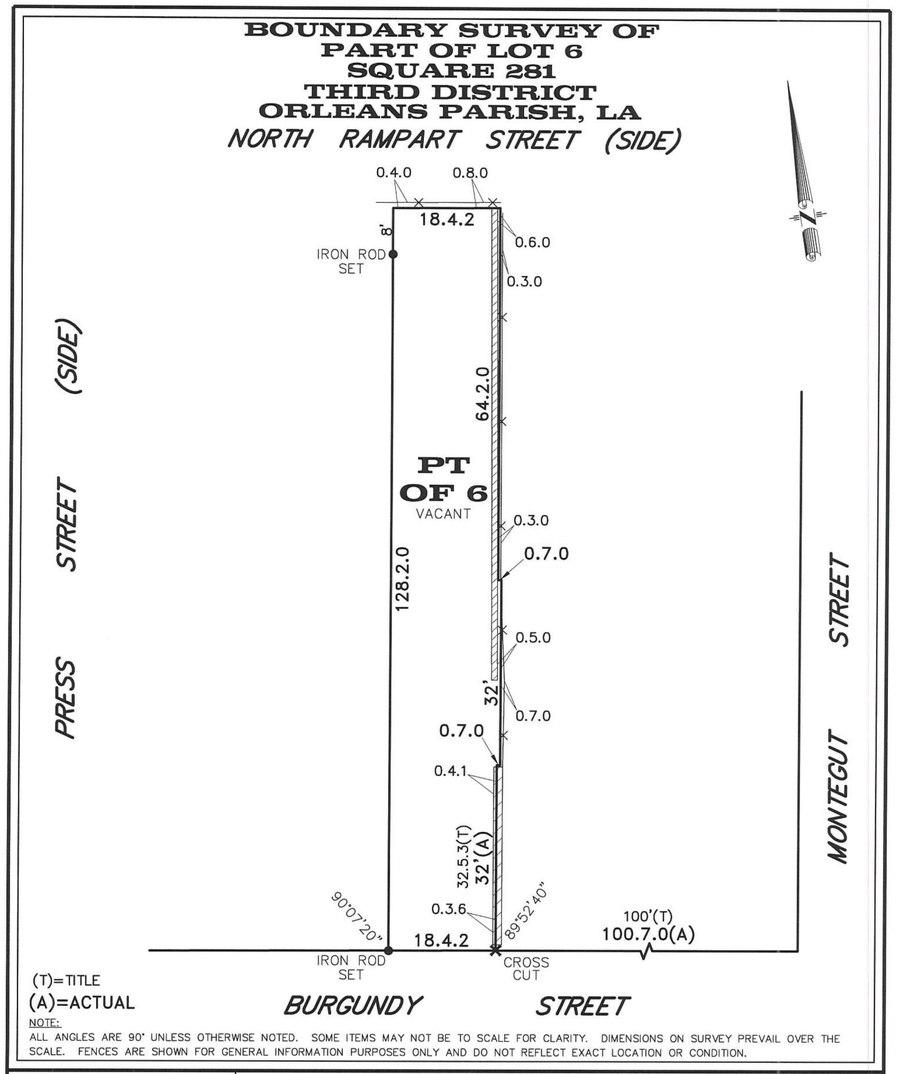

NOTE:
ALL ANGLES ARE 90° UNLESS OTHERWISE NOTED. SOME ITEMS MAY NOT BE TO SCALE FOR CLARITY. DIMENSIONS ON SURVEY PREVAIL OVER THE SCALE. FENCES ARE SHOWN FOR GENERAL INFORMATION PURPOSES ONLY AND DO NOT REFLECT EXACT LOCATION OR CONDITION.

STATE OF LOUISIANA
RICHMOND W. KREBS
REG. NO. 4836
REGISTERED PROFESSIONAL
LAND SURVEYOR

GENERAL NOTES

ANGLES AND/OR BEARINGS ARE BASED ON REFERENCE PLAN #1
REFERENCE PLAN #1: A PLAN OF SURVEY BY GILBERT, KELLY & COUTURIE INC., DATED NOVEMBER 18, 1975

THE SERVITUDES SHOWN ON THIS SURVEY ARE LIMITED TO THOSE FURNISHED US AND THERE IS NO REPRESENTATION THAT ALL APPLICABLE SERVITUDES ARE REFLECTED OR SHOWN HEREON. THE SURVEYOR HAS MADE NO TITLE SEARCH OR PUBLIC RECORD SEARCH IN COMPILING THE DATA FOR THIS SURVEY.

THIS PERIMETER SURVEY SHALL NOT CONSTITUTE A LEGAL OPINION OF TITLE, AND SHALL NOT BE RELIED UPON FOR THAT PURPOSE. THERE IS NO WARRANTY THAT IT CONFORMS TO THE LEGAL TITLE, AND WAS MADE SOLELY ACCORDING TO THE INFORMATION PROVIDED THE SURVEYOR.

ELEVATION NOTES

THIS IS CERTIFY THAT SUBJECT PROPERTY IS LOCATED IN THE FOLLOWING FLOOD ZONE, PER FLOOD INSURANCE RATE MAP (FIRM) DATED: 09-30-16 FLOOD ZONE: X
BASE FLOOD ELEVATION: N/A COMMUNITY PANEL: 22071C 0233 F

THIS IS TO CERTIFY THAT THE PROPERTY BOUNDARY SURVEY RECORDED HEREON WAS MADE ON THE GROUND UNDER MY DIRECT SUPERVISION, AND IS IN ACCORDANCE WITH APPLICABLE STANDARDS OF PRACTICE FOR PROFESSIONAL LAND SURVEYORS AS STIPULATED IN LOUISIANA ADMINISTRATIVE CODE TITLE: 46:LXI, CHAPTER 29 FOR A CLASS "C" (SUBURBAN) SURVEY

MADE AT THE REQUEST OF CARLOS DUPATY

BY:
RICHMOND W. KREBS, PLS, LIC. #4836

R.W. KREBS
PROFESSIONAL LAND SURVEYING, LLC
RICHMOND W. KREBS, SR., PLS
3445 N. CAUSEWAY BLVD, SUITE 201
METAIRIE, LA. 70002
PHONE: (504) 889-9616
FAX: (504) 889-0916
E-MAIL: infonola@rwkrebs.com
WEB: www.rwkrebs.com

DATE: JUNE 6, 2023	DRAWN BY: JSN
SCALE: 1" = 20'	CHECKED BY: NDK
JOB #: 230969	

1/12/2025 10:54:01 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

SURVEY

2023.26

G003

DEPARTMENT OF SAFETY & PERMITS
CITY OF NEW ORLEANS

PERMIT NO: _____ DATE: _____

ADDRESS: 2917 BURGUNDY STREET. - 70117 SUBDIVISION: N/A

DISTRICT: 3RD SQUARE: 281 LOTS: 2

COMMUNITY NUMBER	PANEL NUMBER	SUFFIX	DATE OF FIRM INDEX	FIRM ZONE	BASE FLOOD ELEVATION (BFE)	FREEBOARD (ADD 1FT FOR A AND V ZONES) OFFICE USE ONLY
225 203	0233	F	9/30/16	X	N/A N.A.V.D	+1ft = _____

MINIMUM FLOOR ELEVATION:

_____ N.A.V.D.

****

FOR V - ZONES ONLY:

_____ N.A.V.D.
(ELEVATION OF BOTTOM OF LOWEST HORIZONTAL STRUCTURAL MEMBER)

APPROVED FOR CITY BY: _____

IN ADDITION TO THE FEMA ELEVATIONS, THE FOLLOWING CONDITIONS MUST ALSO BE MET:

A. TOP OF SLABS ON GRADE OR FILL MUST BE AT LEAST 36" ABOVE THE HIGHEST POINT OF CURB IN FRONT OF THE LOT OR SITE.
B. PIER CONSTRUCTION: TOP OF PIERS (UNDERSIDE OF SILLS) MUST HAVE AT LEAST 18" CLEARANCE BENEATH THE STRUCTURE. IN ADDITION, THE LOWEST FLOOR MUST BE AT LEAST 36" ABOVE THE HIGHEST POINT OF CURB IN FRONT OF THE LOT OR SITE. (IF NO CURB, USE CENTERLINE OF STREET)
C. ALL MECHANICAL OR PLUMBING EQUIPMENT SERVICING THE BUILDING MUST BE LOCATED AT OR ABOVE THE REQUIRED FLOOR ELEVATION.
D. SLABS FOR ATTACHED GARAGES MUST BE AT THE REQUIRED FLOOR ELEVATION OR BE CONSTRUCTED OF WATER-RESISTANT MATERIALS WITH PROPER VENTING IN 2 WALLS.
E. DETACHED GARAGES WITH PLUMBING MUST BE AT THE REQUIRED FLOOR ELEVATION.
F. CONSTRUCTION BENCHMARK MUST BE SET AT REQUIRED MINIMUM FLOOR ELEVATION OR GREATER. (*ADD 1 FOOT FOR A & V-ZONES*)

1. CERTIFICATE OF CONSTRUCTION BENCHMARK

FOR PERMIT OFFICE USE ONLY
ADD 3ft to curb, if no curb use the centerline of street
_____ + 3ft

EXISTING HIGHEST TOP OF CURB ELEVATION N/A N.A.V.D.
EXISTING HIGHEST CENTERLINE OF STREET 3.3' N.A.V.D.

EXISTING LOT ELEVATIONS (PROPERTY CORNERS OR EDGE)
FRONT (RIGHT) 4.4' N.A.V.D. FRONT (LEFT) 3.9' N.A.V.D.
REAR (RIGHT) 4.1' N.A.V.D. REAR (LEFT) 4.0' N.A.V.D.
OTHER: _____ N.A.V.D.
DESCRIBE: _____

DESCRIPTION OF CONSTRUCTION BENCHMARK: 60d NAIL IN POWER POLE BY RIGHT PROPERTY LINE. NAIL ON WEST SIDE OF POWER POLE.

ELEVATION OF CONSTRUCTION BENCHMARK: 6.3' N.A.V.D. (SEE NOTE F.)
REFERENCE BENCHMARK USED TO ESTABLISH CONSTRUCTION BENCHMARK: ALCO
ELEVATION OF REFERENCE BENCHMARK: 5.8' N.A.V.D.

STATE OF LOUISIANA
RAYMOND W. KREBS
REGISTERED PROFESSIONAL LAND SURVEYOR

SIGNATURE: _____ DATE: MAY 22, 2023
(LA. REGISTERED PROFESSIONAL LAND SURVEYOR OR CIVIL ENGINEER) (SEAL)

****

2. CERTIFICATE OF TOP OF FORM OR TOP OF PIER ELEVATION
(To be submitted before pouring concrete for slab construction or framing floor for pier construction)

AS BUILT ELEVATIONS: FORM_____ N.A.V.D. PIER _____ N.A.V.D.

PIER CONSTRUCTION:
ALL FRAMING MATERIALS BELOW THE MINIMUM FLOOR ELEVATION (B.F.E.) MUST BE CONSTRUCTED WITH WATER-RESISTANT MATERIALS AND THE FIRST FLOOR MUST BE AT OR ABOVE THE MINIMUM FLOOR ELEVATION (B.F.E.).

V ZONES ONLY:
BOTTOM OF LOWEST HORIZONTAL STRUCTURAL MEMBER _____ N.A.V.D.
(Must be submitted before framing begins)
IN V ZONES, ALL ENCLOSURES BELOW THE B.F.E. MUST BE DESIGNED WITH BREAK-AWAY WALLS CONSTRUCTION.

SIGNATURE :_____DATE: _____
(LA. REGISTERED PROFESSIONAL LAND SUVEYOR OR CIVIL ENGINEER) (SEAL)

****

3. FILLING, GRADING, DRAINAGE, SIDEWALK AND DRIVEWAY CERTIFICATION AND AFFIDAVIT
(To be submitted before Use & Occupancy Certificate can be issued)

THIS WILL CONFIRM THAT ALL FILLING, GRADING, DRAINAGE, SIDEWALKS AND DRIVEWAYS HAVE MET THE REQUIREMENTS OF THE APPLICABLE SECTIONS OF THE CODE OF THE CITY OF NEW ORLEANS.

OWNER: _____ DATE: _____

APPLICANT: _____ DATE: _____ _____
(NOTARY)

OR

IS LOT PROPERLY FILLED TO GRADE? _____ YES _____ NO
(minimum lot slope, rear to front, 1 inch every 20 feet)
ARE SIDEWALKS PROPERLY INSTALLED? ____ YES ____ NO
ARE DRIVEWAYS PROPERLY INSTALLED? ____ YES ____ NO
ARE RETAINING WALLS REQUIRED? ____ YES ____ NO
(if yes, then on which side(s)____ RIGHT ____ LEFT ____ REAR
ARE EQUIPMENT SLABS, SUCH AS A/C COMPRESSORS, AT MINIMUM FLOOR ELEVATION? ____YES ____NO
DO ATTACHED GARAGES IN A-ZONES, THAT ARE BELOW MINIMUM FLOOR ELEVATION, HAVE PROPER VENTING AND WATERPROOFING? ____YES ____NO ____N/A

SIGNATURE: _____ DATE: _____
(LA. REGISTERED PROFESSIONAL CIVIL ENGINEER) (SEAL)

THE LATEST FEMA ELEVATION CERTIFICATE MUST ACCOMPANY PART 3 OF THIS FORM WHEN SUBMITTED TO THE DEPARTMENT OF SAFETY AND PERMITS. 2016

1/12/2025 10:54:02 PM

2917 BURGUNDY STREET. - 70117

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

BENCHMARK

2023.26

G004

1/4" = 1'-0"
LEVEL ONE (3)

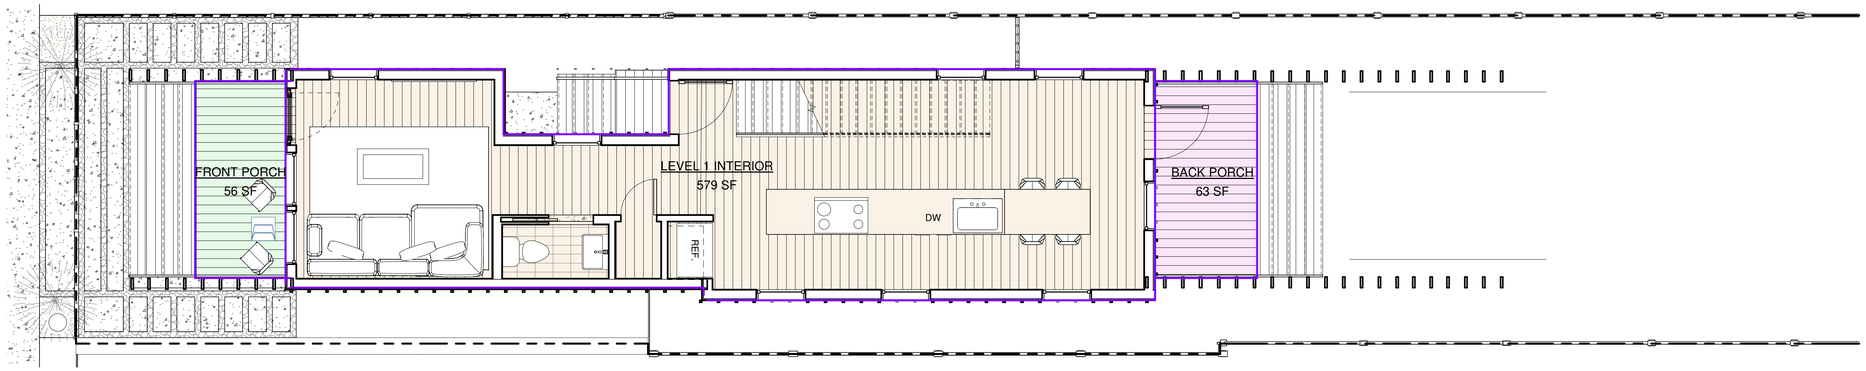

Building Area Legend

- BACK PORCH
- FRONT PORCH
- LEVEL 1 INTERIOR

1/4" = 1'-0"
LEVEL TWO (1)

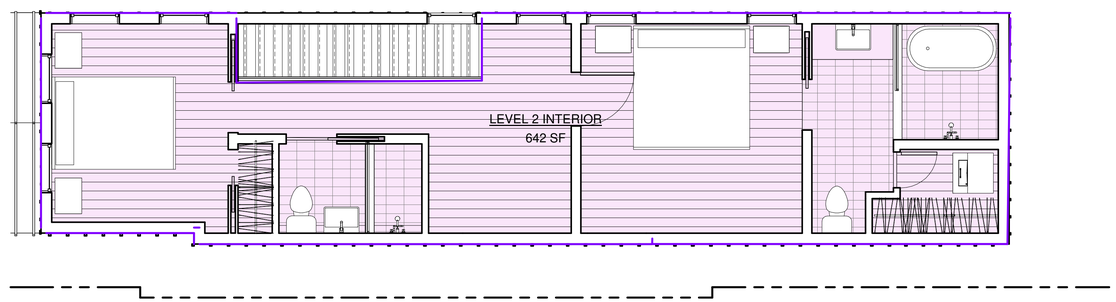

Building Area Legend

- LEVEL 2 INTERIOR

GROSS BUILDING AREA SCHEDULE

Name	Level	Area Type	Area	Comments
LEVEL 1 INTERIOR	LEVEL ONE	Gross Building Area	579 SF	
LEVEL ONE			579 SF	
LEVEL 2 INTERIOR	LEVEL TWO	Gross Building Area	642 SF	
LEVEL TWO			642 SF	
			1221 SF	
FRONT PORCH	LEVEL ONE	Exterior Area	56 SF	
BACK PORCH	LEVEL ONE	Exterior Area	63 SF	
LEVEL ONE			119 SF	
			119 SF	
Grand total			1340 SF	

1/12/2025 10:54:11 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

AREA PLANS + SCHEDULE

2023.26

G005

3/16" = 1'-0"
SITE PLAN (1)

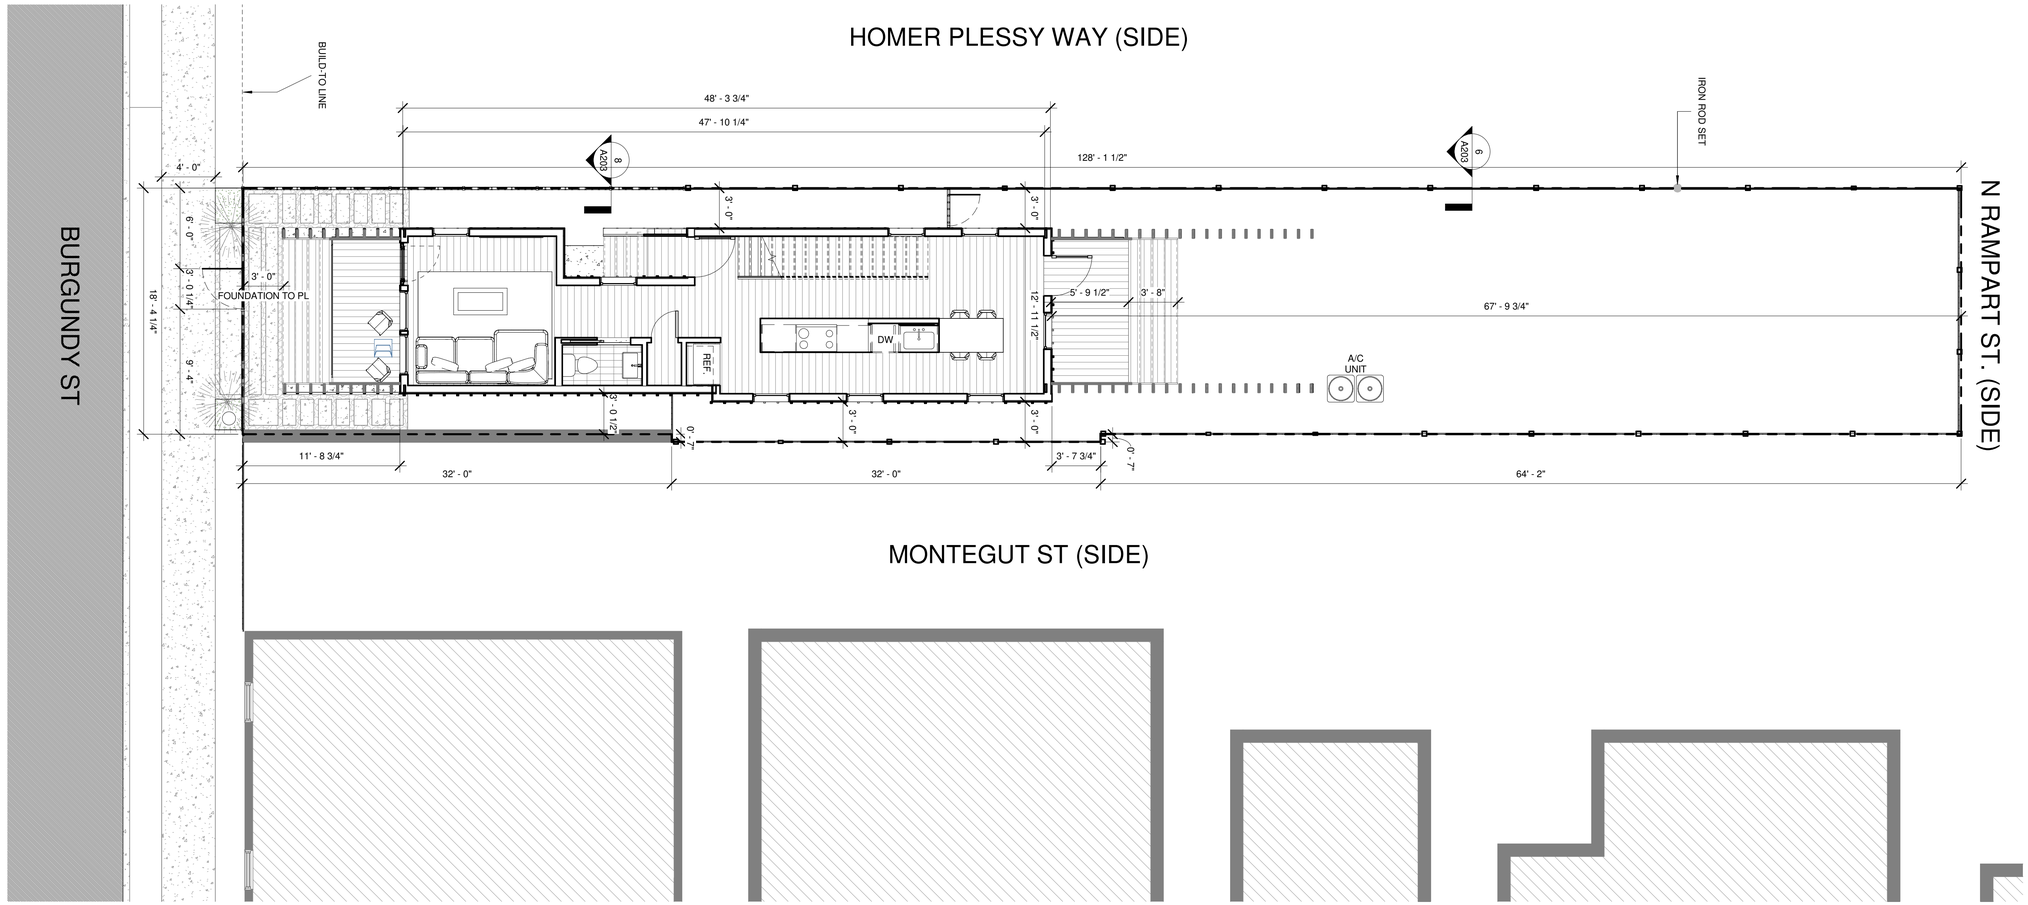

(2) SITE ELEVATION
3/16" = 1'-0"

1/12/2025 10:54:15 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

SITE PLAN

2023.26

A050

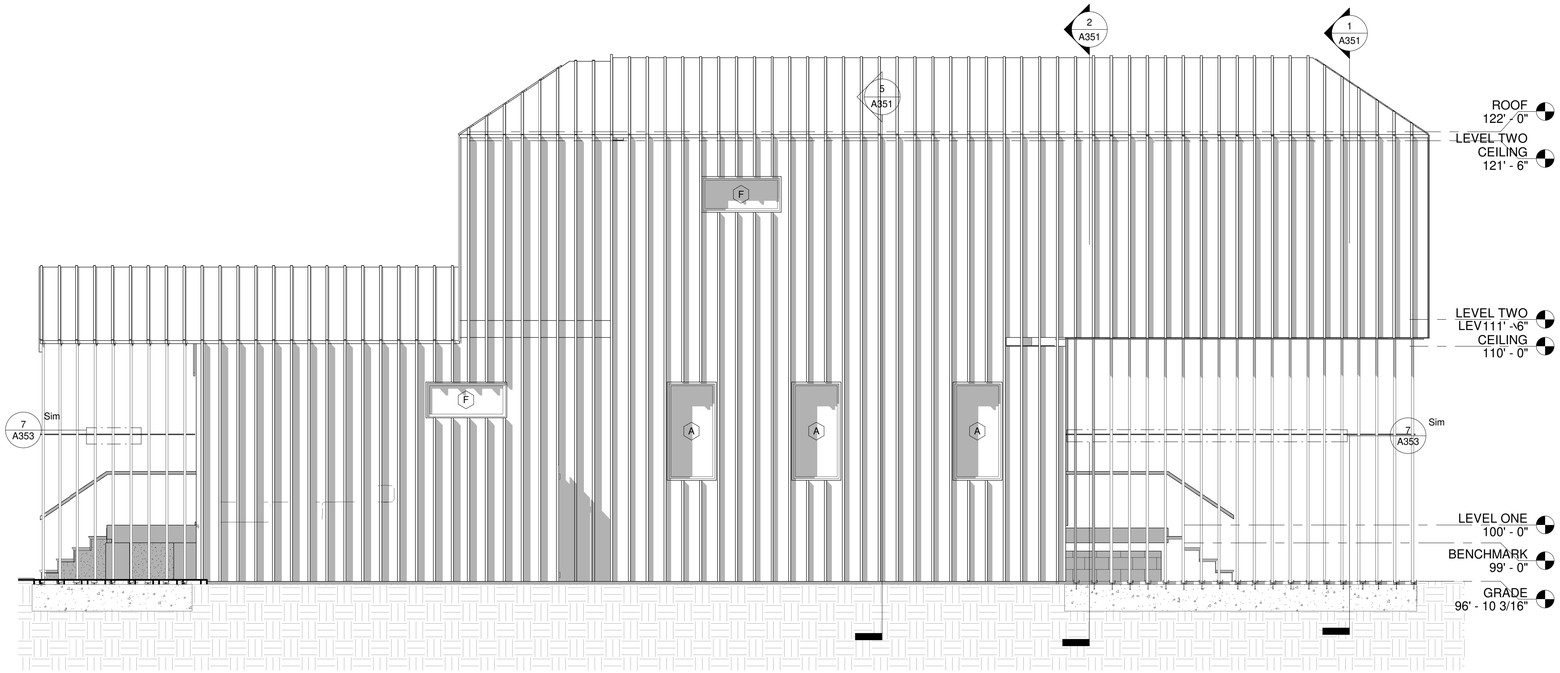

3 ELEVATION - SIDE
1/4" = 1'-0"

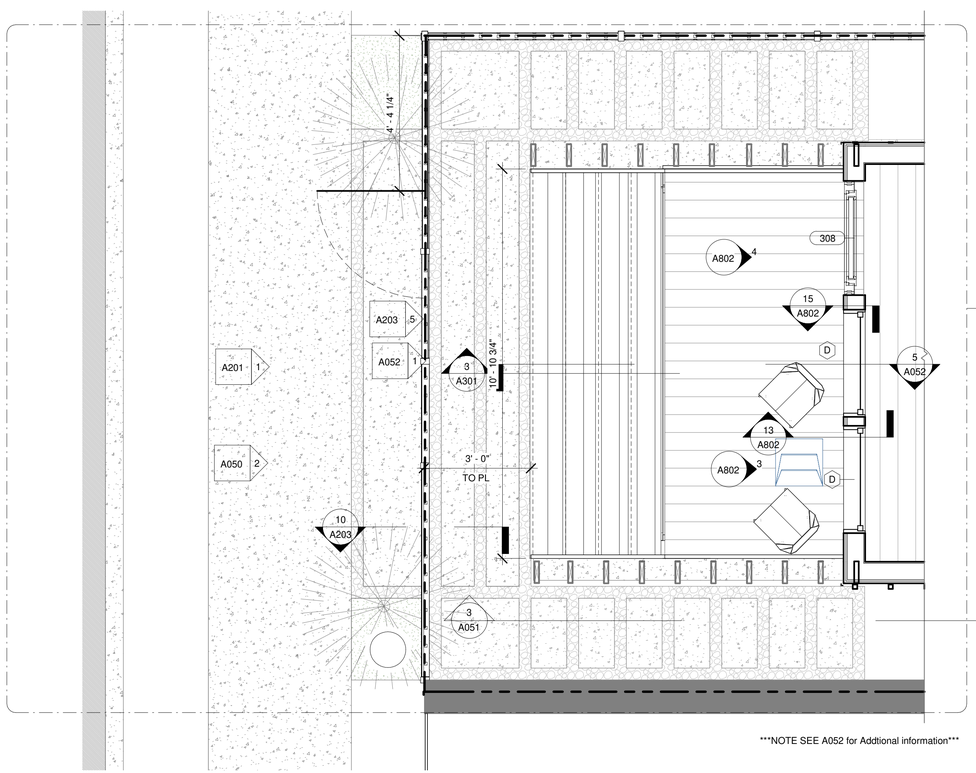

NOTE SEE A052 for Addtional information

1 ENLARGED - PLAN - FRONT
1/2" = 1'-0"

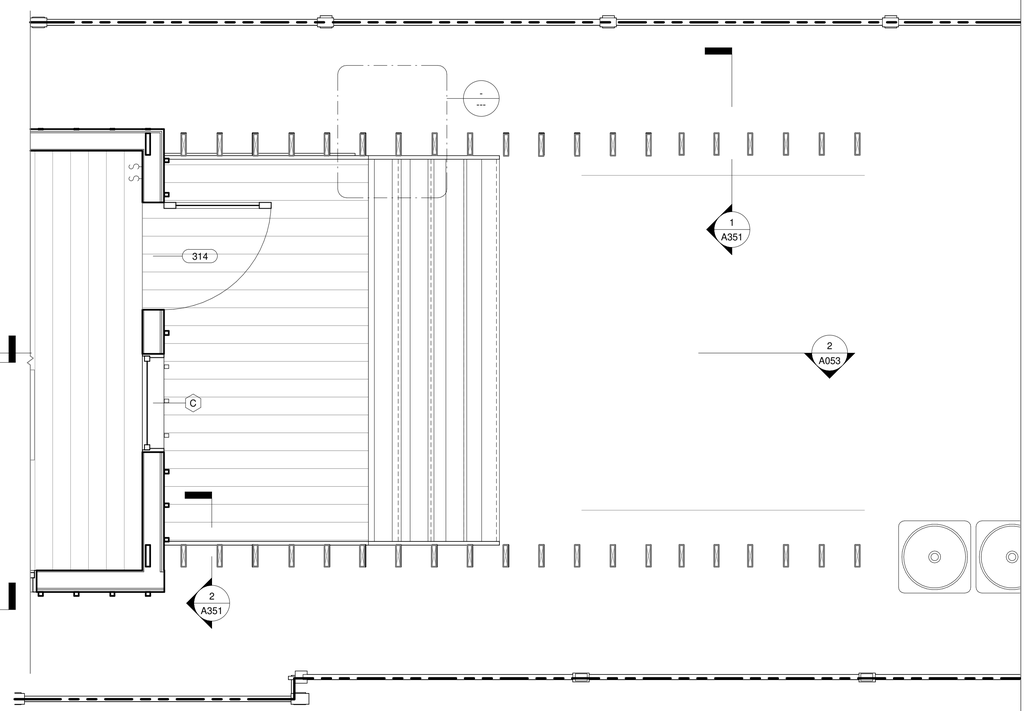

NOTE SEE A053 for Addtional information

2 ENLARGED - PLAN - REAR
1/2" = 1'-0"

1/12/2025 10:54:20 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

COLUMN CONNECTION

2023.26

A051

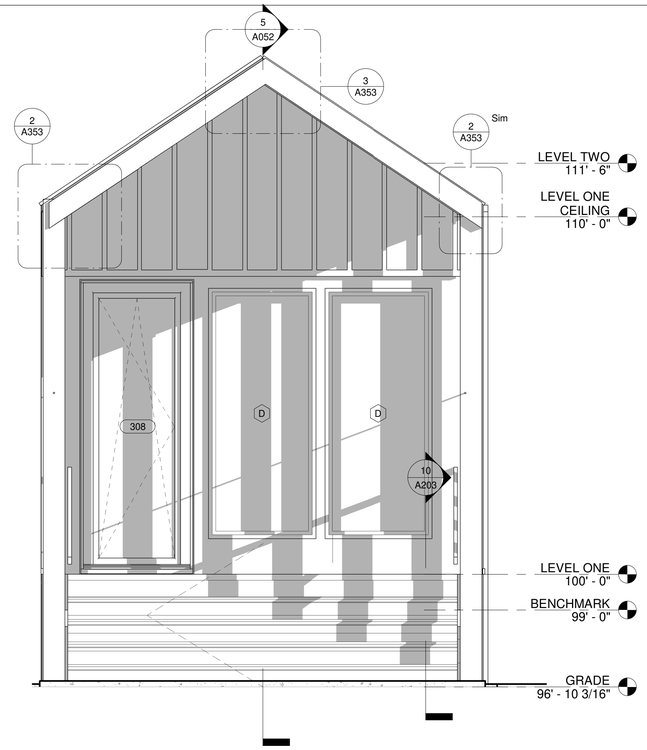

1 ELEVATION - FRONT
1/2" = 1'-0"

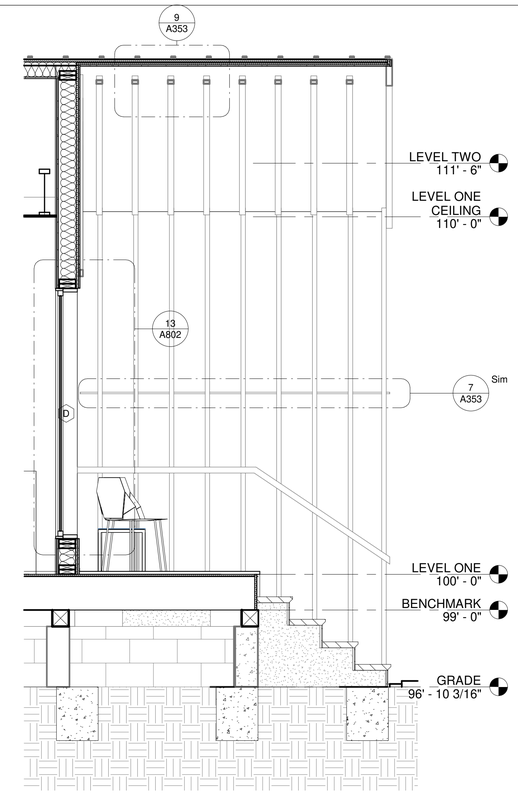

5 SECTION - FRONT PORCH
1/2" = 1'-0"

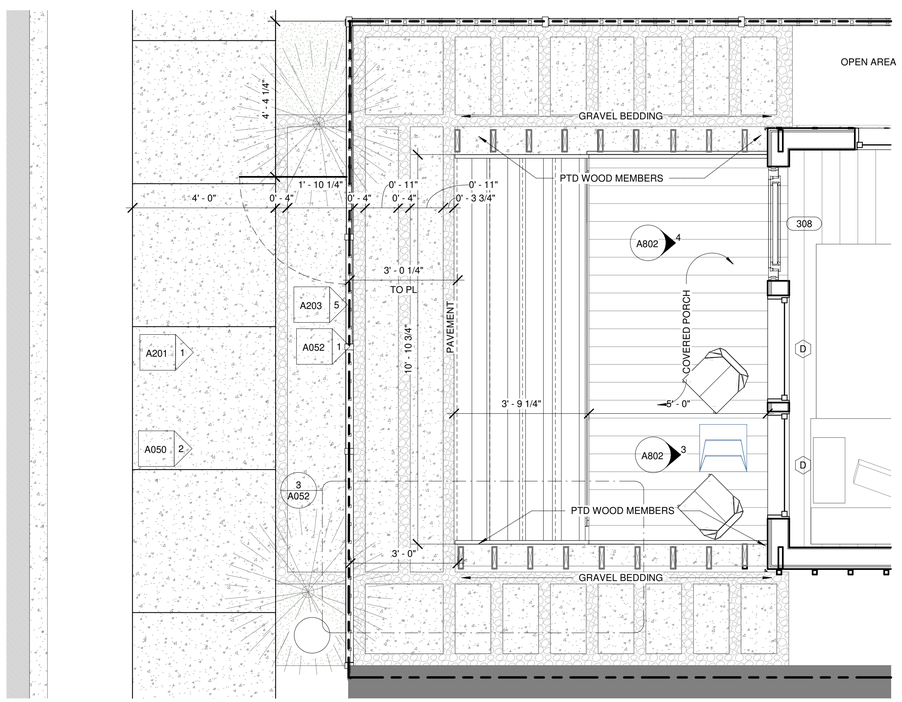

2 ENLARGED - PLAN - FRONT STAIR
1/2" = 1'-0"

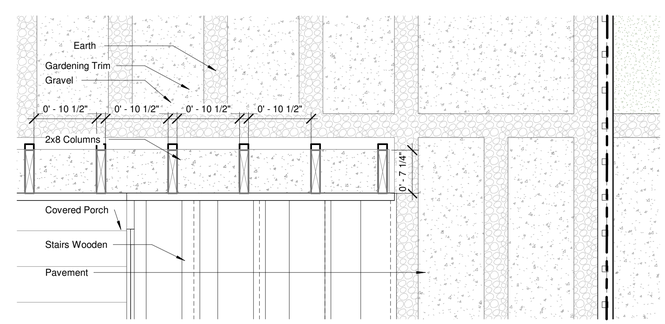

3 ENLARGED - PLAN - WOOD COLUMNS
1" = 1'-0"

STAIR NOTES:

1. TREADS 11" MINIMUM TOE TO TOE
2. RISERS 7 3/4" MAXIMUM
3. HANDRAILS 2'-10"
4. (3) 2X12 STRINGERS
5. 3-7/8" MAX SPACING BETWEEN BALUSTERS

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

STAIR ELEVATIONS ONE

2023.26

A052

1/12/2025 10:54:24 PM

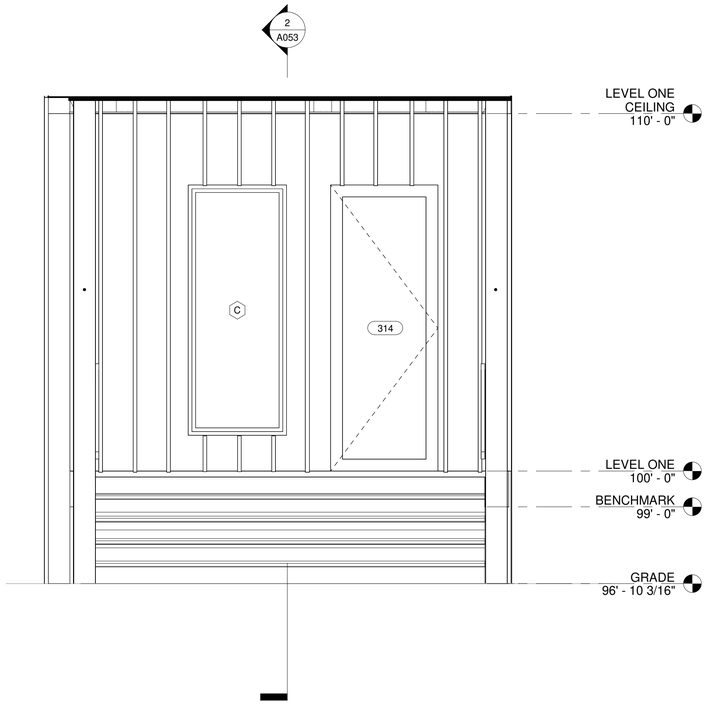

1 ELEVATION - REAR
1/2" = 1'-0"

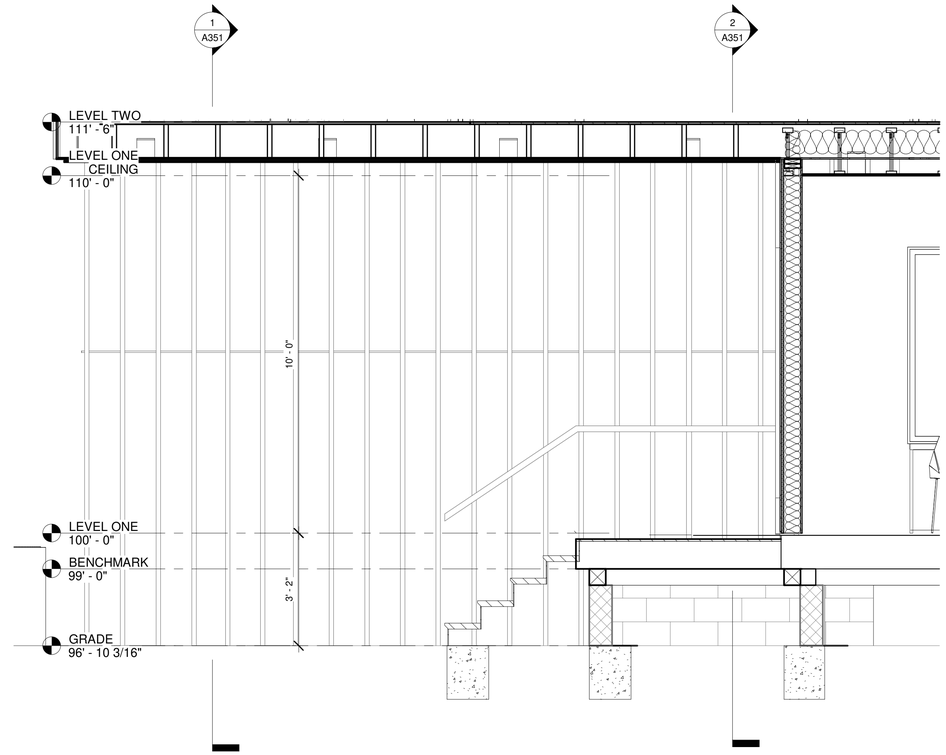

2 Section 5
1/2" = 1'-0"

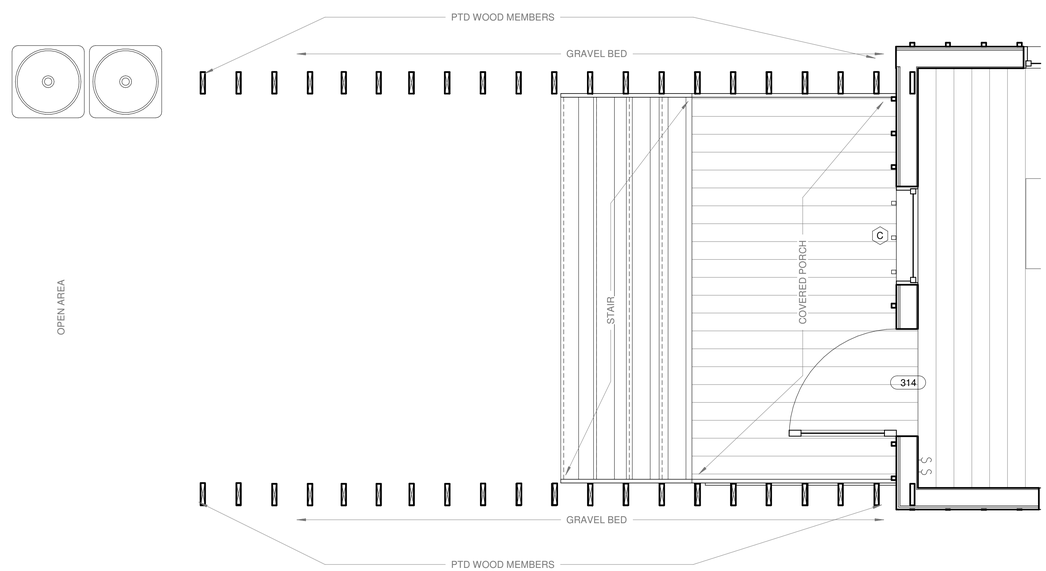

STAIR NOTES:

1. TREADS 11" MINIMUM TOE TO TOE
2. RISERS 7 3/4" MAXIMUM
3. HANDRAILS 2'-10"
4. (3) 2X12 STRINGERS
5. 3-7/8" MAX SPACING BETWEEN BALUSTERS

3 Plan View Back - Callout 1
1/2" = 1'-0"

1/12/2025 10:54:25 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

STAIR
ELEVATIONS
TWO

2023.26

A053

1/4" = 1'-0" (2) LEVEL TWO

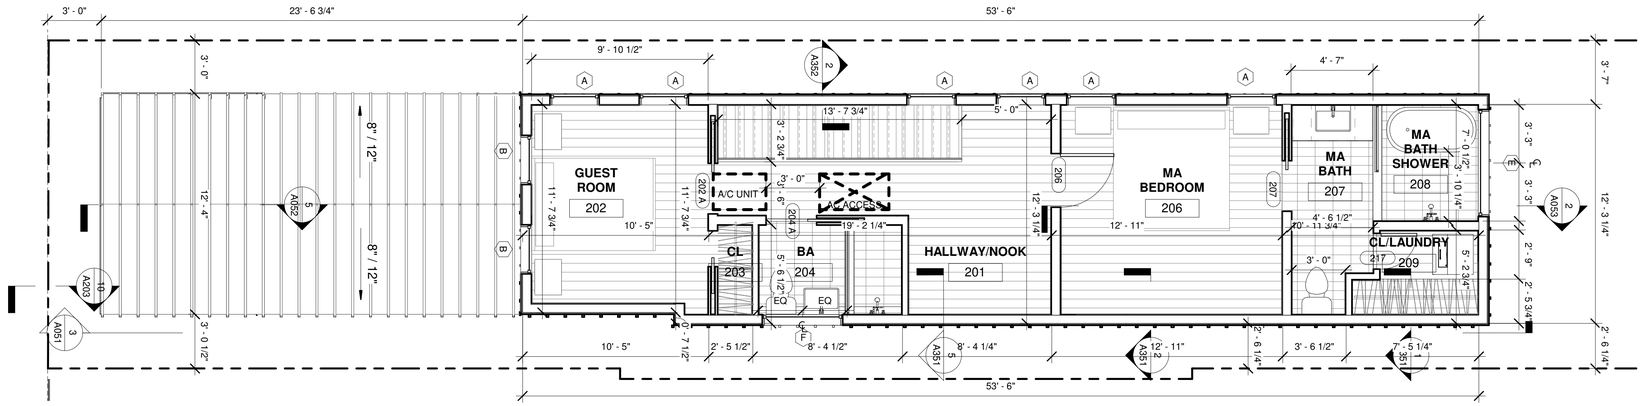

1/4" = 1'-0" (1) LEVEL ONE

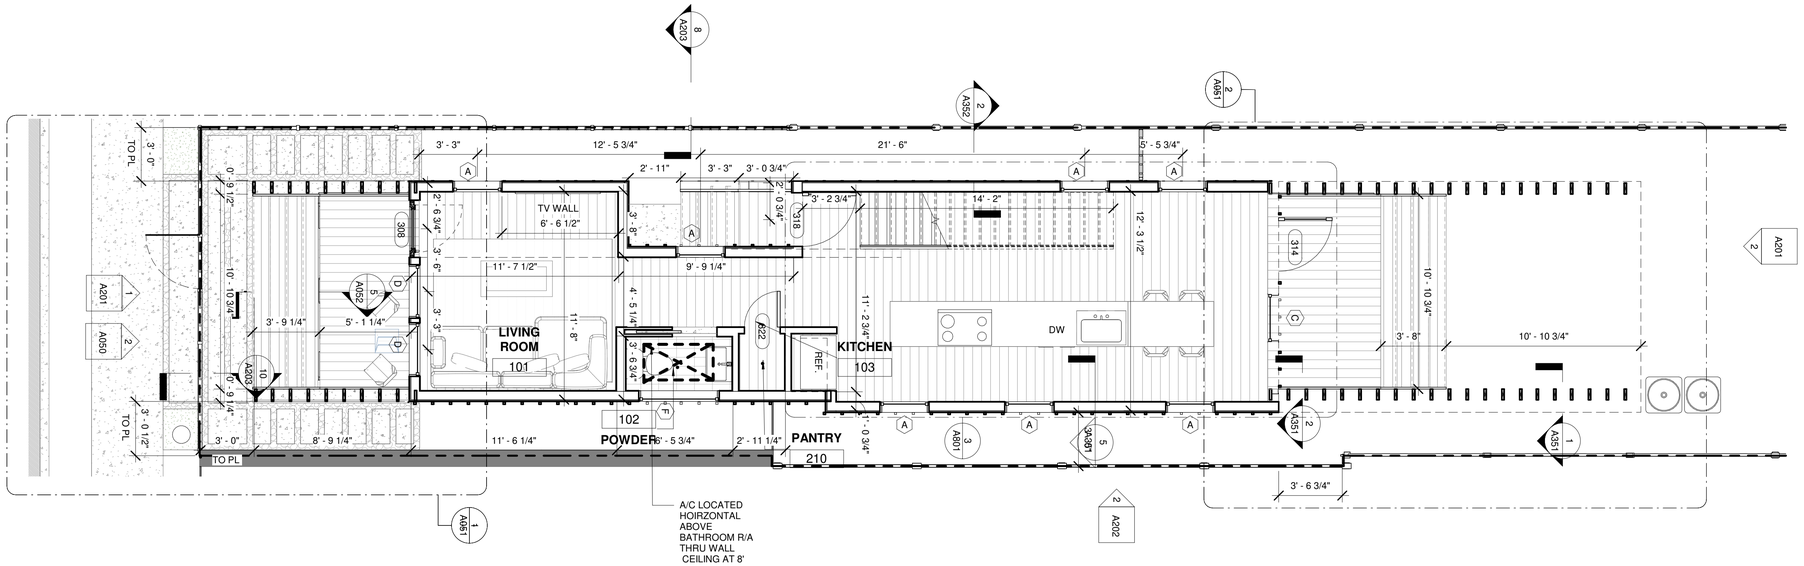

Room Schedule			
Name	Number	Area	Level
Kitchen	104	Not Placed	Not Placed
Kitchen	105	Not Placed	Not Placed
LIVING ROOM	101	172 SF	LEVEL ONE
POWDER	102	18 SF	LEVEL ONE
KITCHEN	103	Redundant Room	LEVEL ONE
PANTRY	210	8 SF	LEVEL ONE
HALLWAY/ NOOK	201	159 SF	LEVEL TWO
GUEST ROOM	202	110 SF	LEVEL TWO

Room Schedule			
Name	Number	Area	Level
CL	203	10 SF	LEVEL TWO
BA	204	22 SF	LEVEL TWO
Large Shower	205	12 SF	LEVEL TWO
MA BEDROOM	206	145 SF	LEVEL TWO
MA BATH	207	50 SF	LEVEL TWO
MA BATH SHOWER	208	35 SF	LEVEL TWO
CL/LAUND RY	209	29 SF	LEVEL TWO

Window Schedule				
Type Mark	Width	Height	Count	Type Comments
A	2' - 9"	5' - 6"	13	CASEMENT. EGRESS.
B	2' - 9"	4' - 6"	2	Fixed
C	2' - 9"	7' - 0"	1	Fixed
D	3' - 0"	7' - 0"	2	Fixed
E	6' - 0"	3' - 0"	1	Fixed
F	4' - 6"	2' - 0"	2	Fixed

Door Schedule			
Mark	Width	Height	Comments
202 A	2' - 10"	8' - 0"	Interior Door
204 A	2' - 10"	8' - 0"	Interior Door
206	3' - 0"	7' - 0"	Interior Door
207	2' - 10"	8' - 0"	Interior Door
210	2' - 0"	8' - 0"	Interior Door
217	2' - 0"	8' - 0"	Interior Door
308	3' - 0"	8' - 0"	Exterior Door Front
314	3' - 0"	8' - 0"	Interior Door
317	2' - 6"	8' - 0"	Exterior Door Back
318	3' - 0"	8' - 0"	Side Door
322	2' - 0"	6' - 8"	Interior Door

STAIR NOTES:

1. TREADS 11" MINIMUM TOE TO TOE
2. RISERS 7 3/4" MAXIMUM
3. HANDRAILS 2'-10"
4. (3) 2X12 STRINGERS
5. 3-7/8" MAX SPACING BETWEEN BALUSTERS

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

FLOOR PLANS

2023.26

A101

1/12/2025 10:54:27 PM

ROOF PLAN

1/4" = 1'-0" (1) ROOF

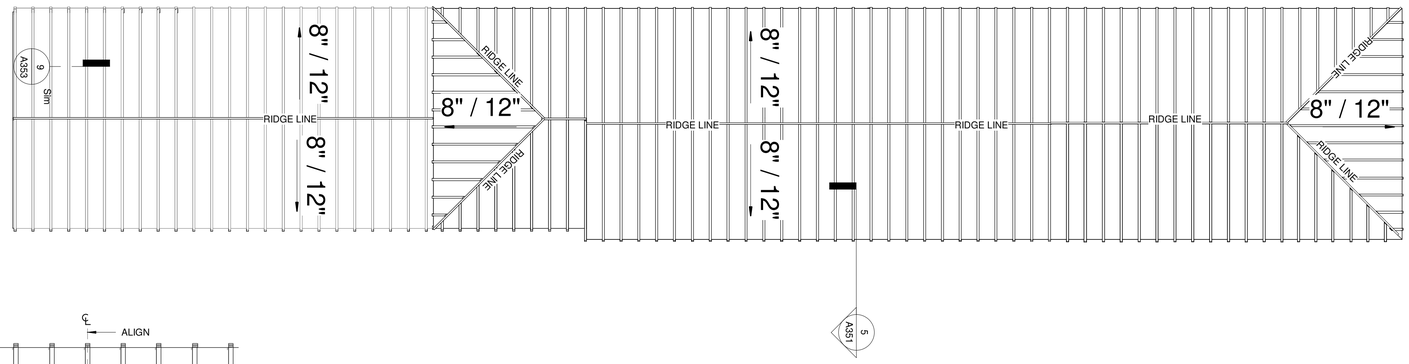

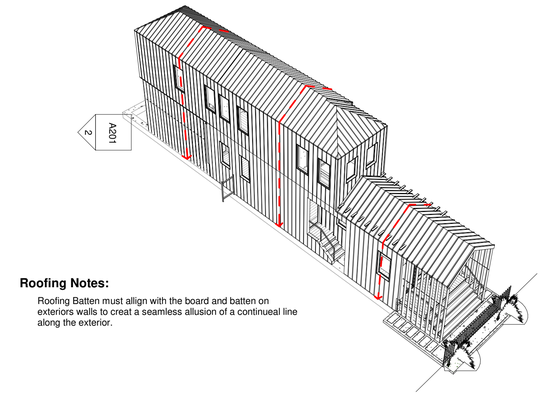

Roofing Notes:

Roofing Batten must allign with the board and batten on exteriors walls to creat a seamless allusion of a continueal line along the exterior.

(2) 3D VIEW

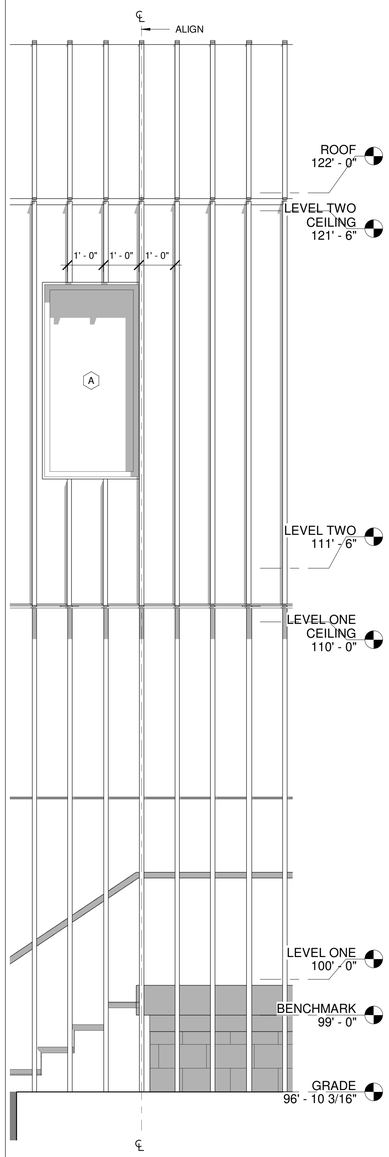

(3) DETAIL - SIDING SPACING
1/2" = 1'-0"

Snap bottom detailing GC to verify batten & standing seam w/ arch prior to fabrication & install.

Custom Component & Building INC.
Phone: 608.758.2736
Web: https://www.customcompbldg.com/contact.aspx

SECTION:

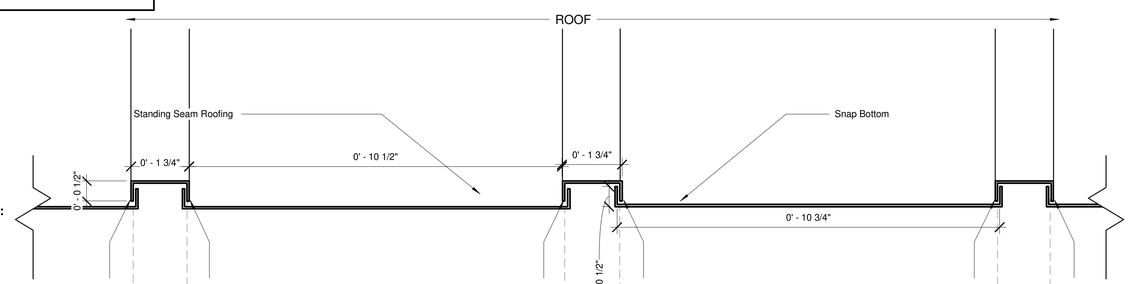

PLAN:

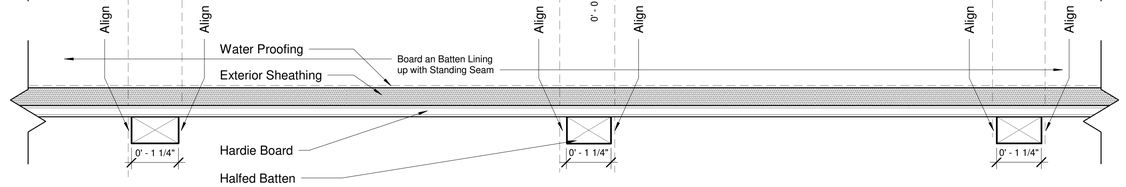

Full Batten Detail:

Battens will be halfed and alligned with Standing Seamed Roof



(1) SNAP BOTTOM DETAILING
6" = 1'-0"

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

ROOF PLAN

2023.26

A121

1/12/2025 10:54:30 PM

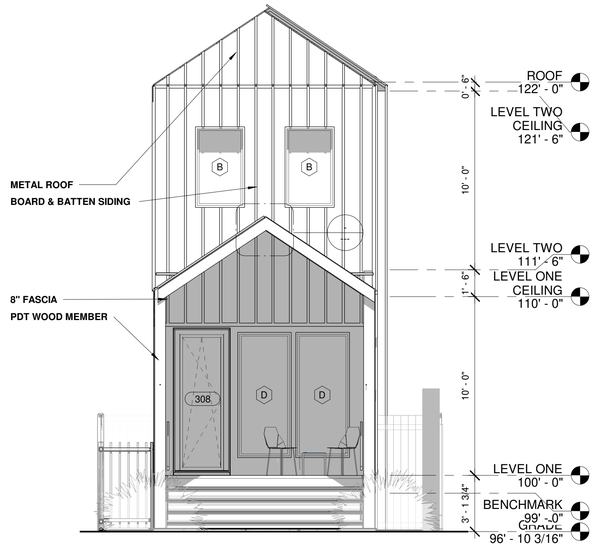

1 FRONT ELEVATION
1/4" = 1'-0"

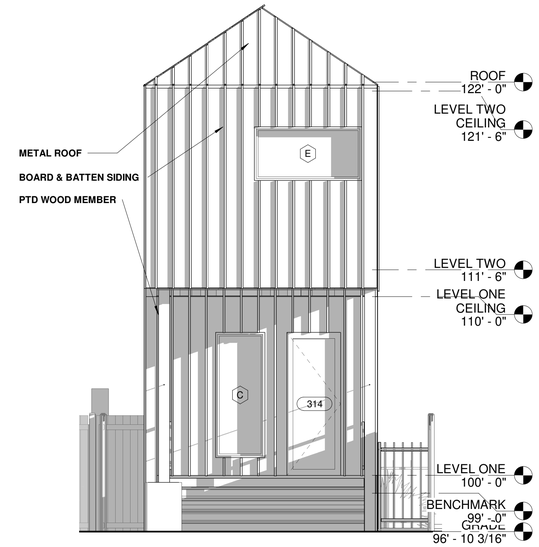

2 REAR ELEVATION
1/4" = 1'-0"

Snap bottom detailing GC to verify batten & standing seam
w/ arch prior to fabrication & install.

Custom Component & Building INC.
Phone: 608.758.2736
Web: https://www.customcompbldg.com/contact.aspx

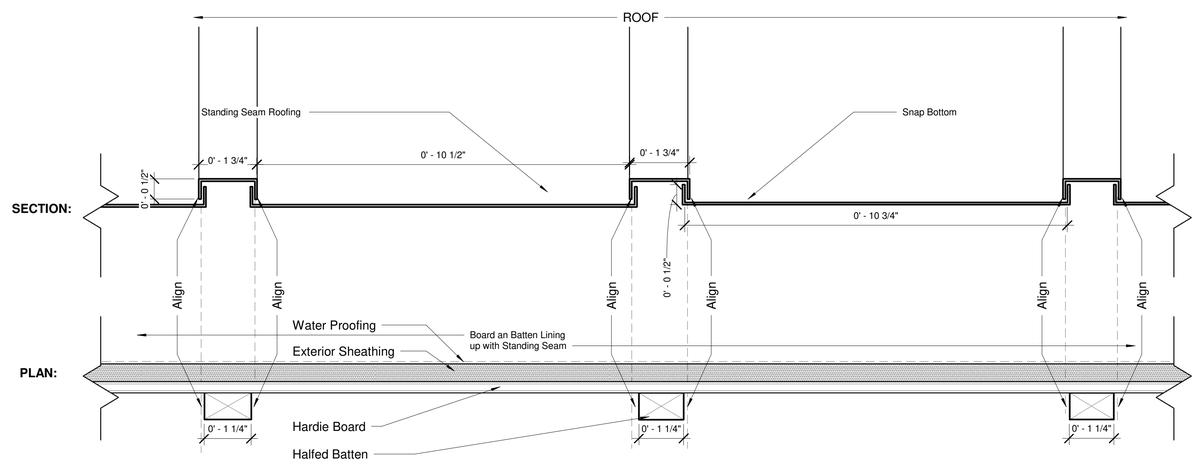

Full Batten Detail:

Battens will be halfed and alligned with
Standing Seamed Roof



SNAP BOTTOM DETAILING
6" = 1'-0"

1/12/2025 10:54:34 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

EXTERIOR
ELEVATIONS

2023.26

A201

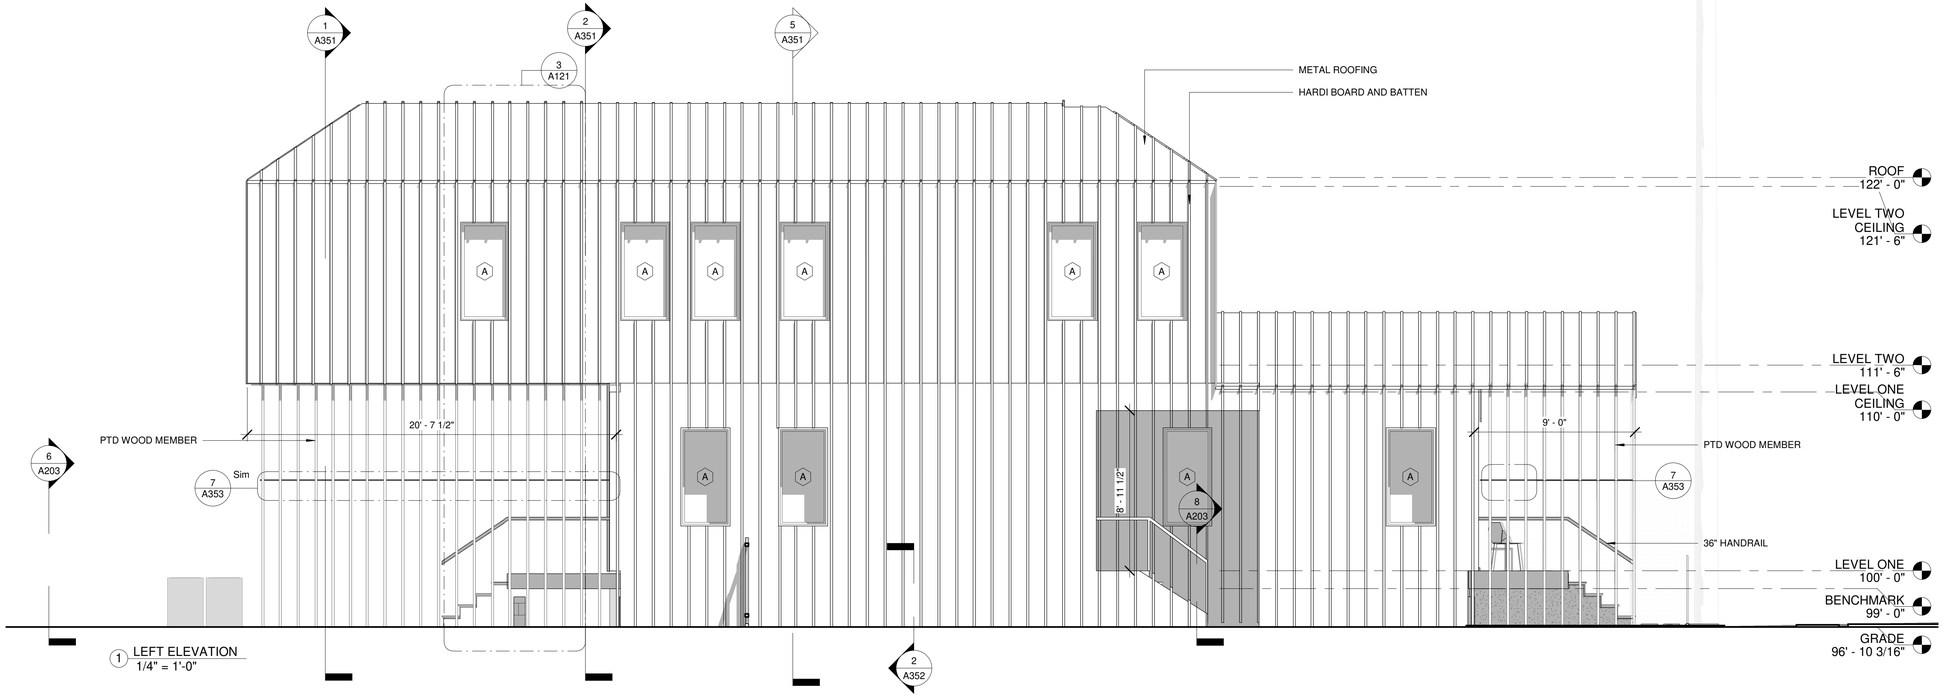

1 LEFT ELEVATION
1/4" = 1'-0"

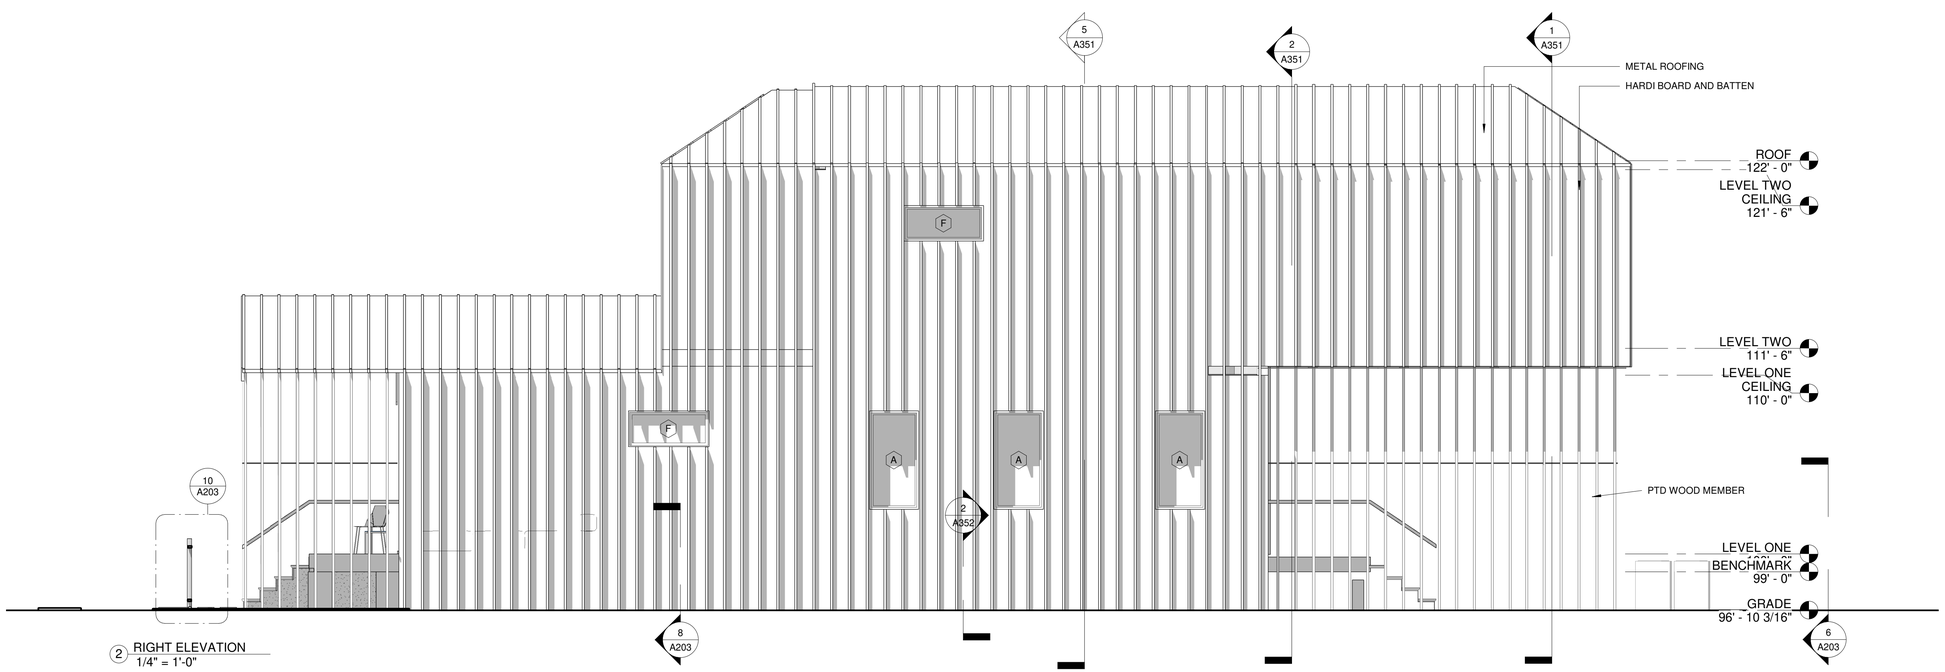

2 RIGHT ELEVATION
1/4" = 1'-0"

1/12/2025 10:54:38 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

EXTERIOR ELEVATIONS

2023.26

A202

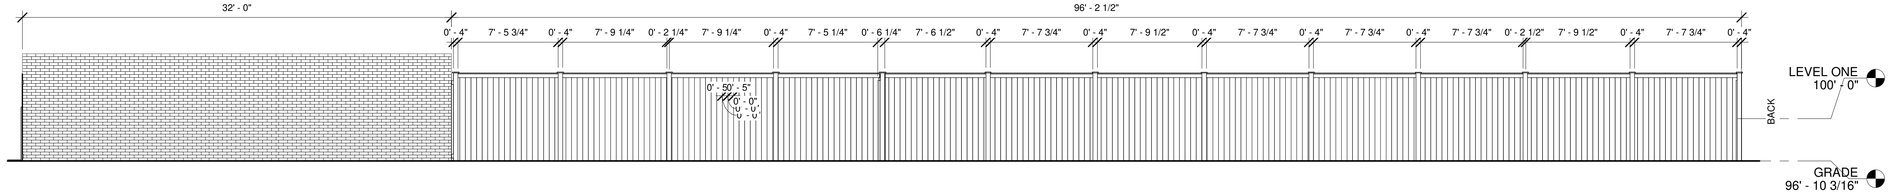

1 Fence Elevation Two
3/16" = 1'-0"

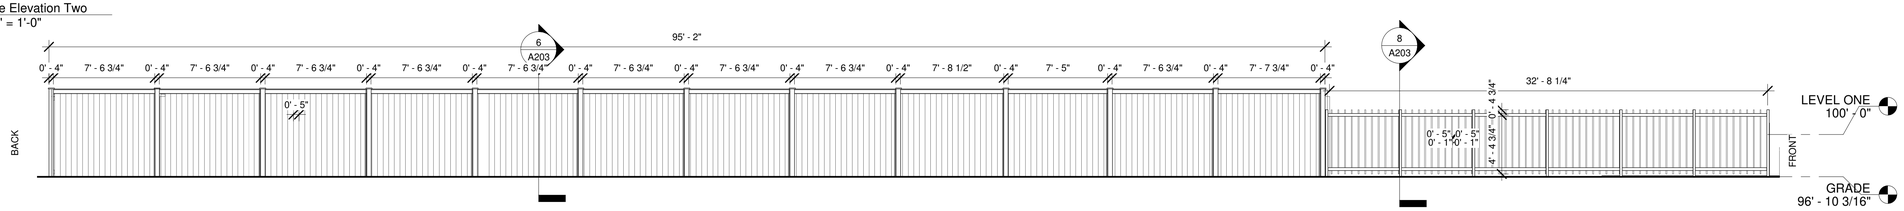

2 Fence Elevation One
3/16" = 1'-0"



4 FENCE SIDE YARD METAL
3/16" = 1'-0"

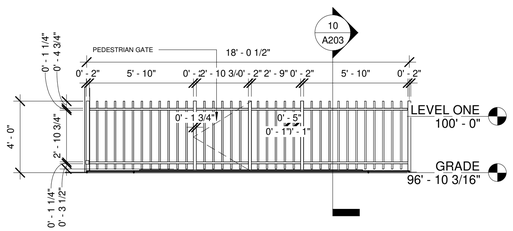

5 FRONT FENCE AND GATE
1/4" = 1'-0"



3 FENCE SIDE YARD
3/16" = 1'-0"



12 BACK FENCE ELEVATION
3/16" = 1'-0"

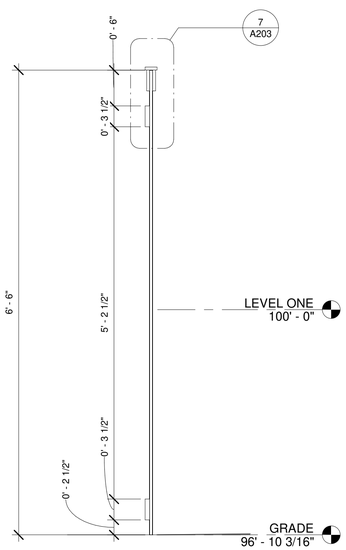

6 SECTION -
1" = 1'-0"



7 Section 9 - Callout 1
3" = 1'-0"

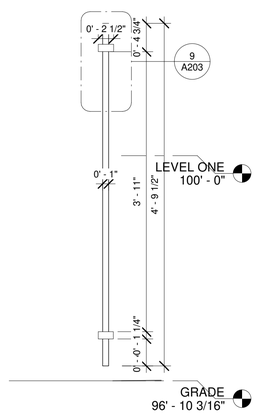

8 Section 10
1" = 1'-0"



9 Section 10 - Callout 1
1 : 6

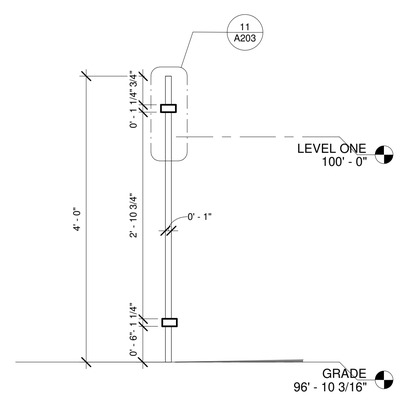

10 FRONT FENCE SECTION
1" = 1'-0"



11 FRONT FENCE SECTION - Callout 1
1 : 6

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

EXTERIOR GATE ELEVATIONS

2023.26

A203

1/12/2025 10:54:42 PM

STAIR NOTES:

1. TREADS 11" MINIMUM TOE TO TOE
2. RISERS 7 3/4" MAXIMUM
3. HANDRAILS 2'-10"
4. (3) 2X12 STRINGERS
5. 3-7/8" MAX SPACING BETWEEN BALUSTERS

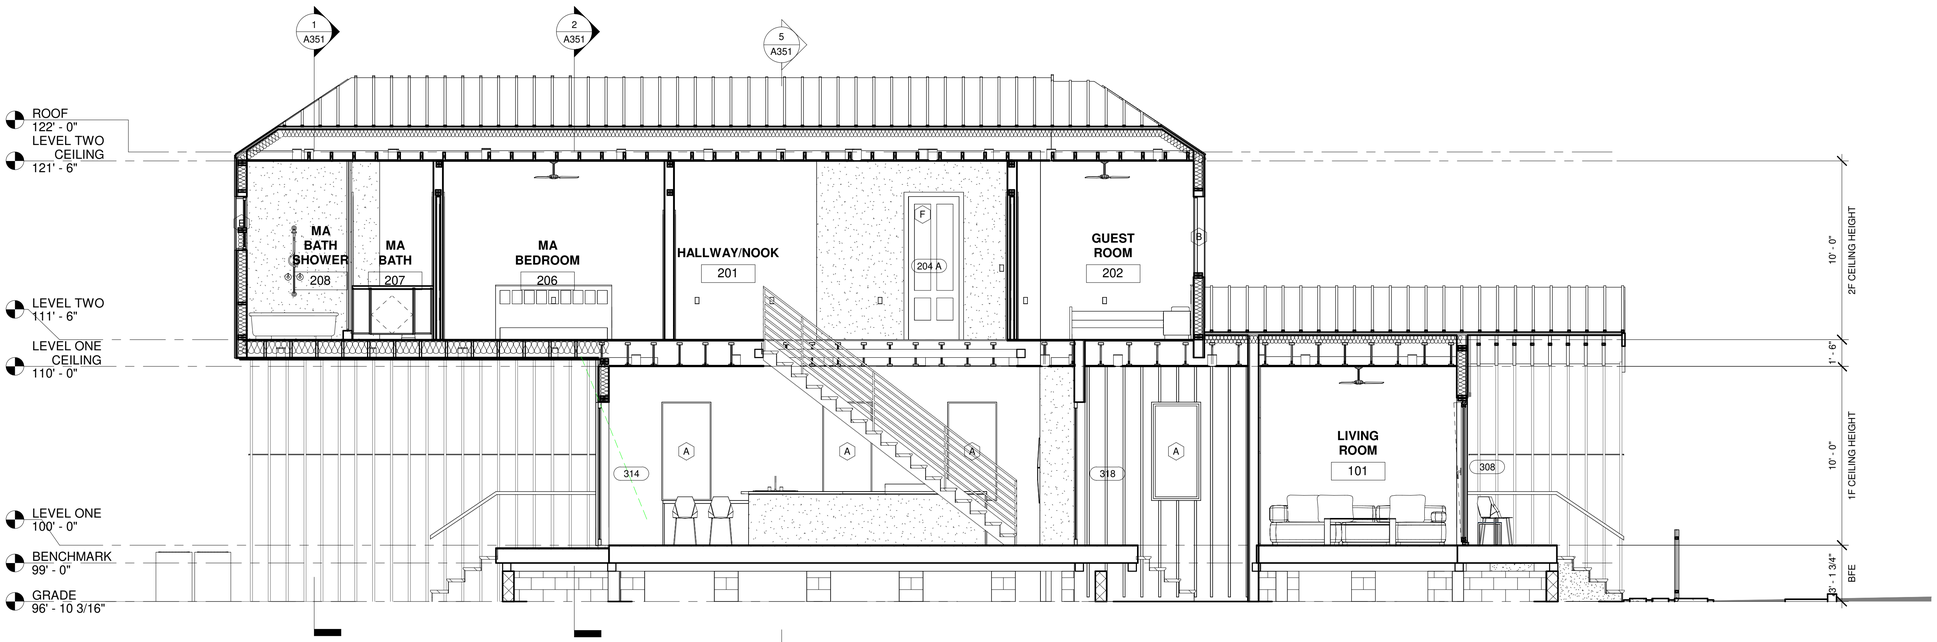

1 LONGITUDINAL SECTION _ 1
1/4" = 1'-0"

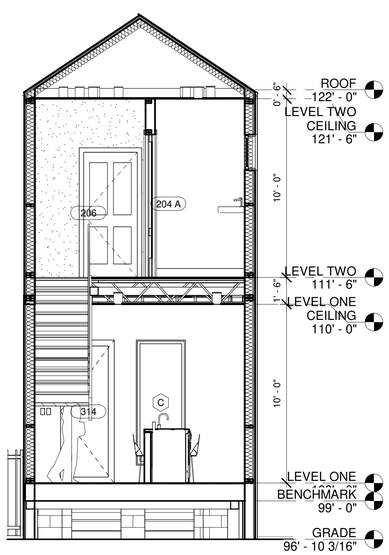

2 TRANSVERSE SECTION
1/4" = 1'-0"

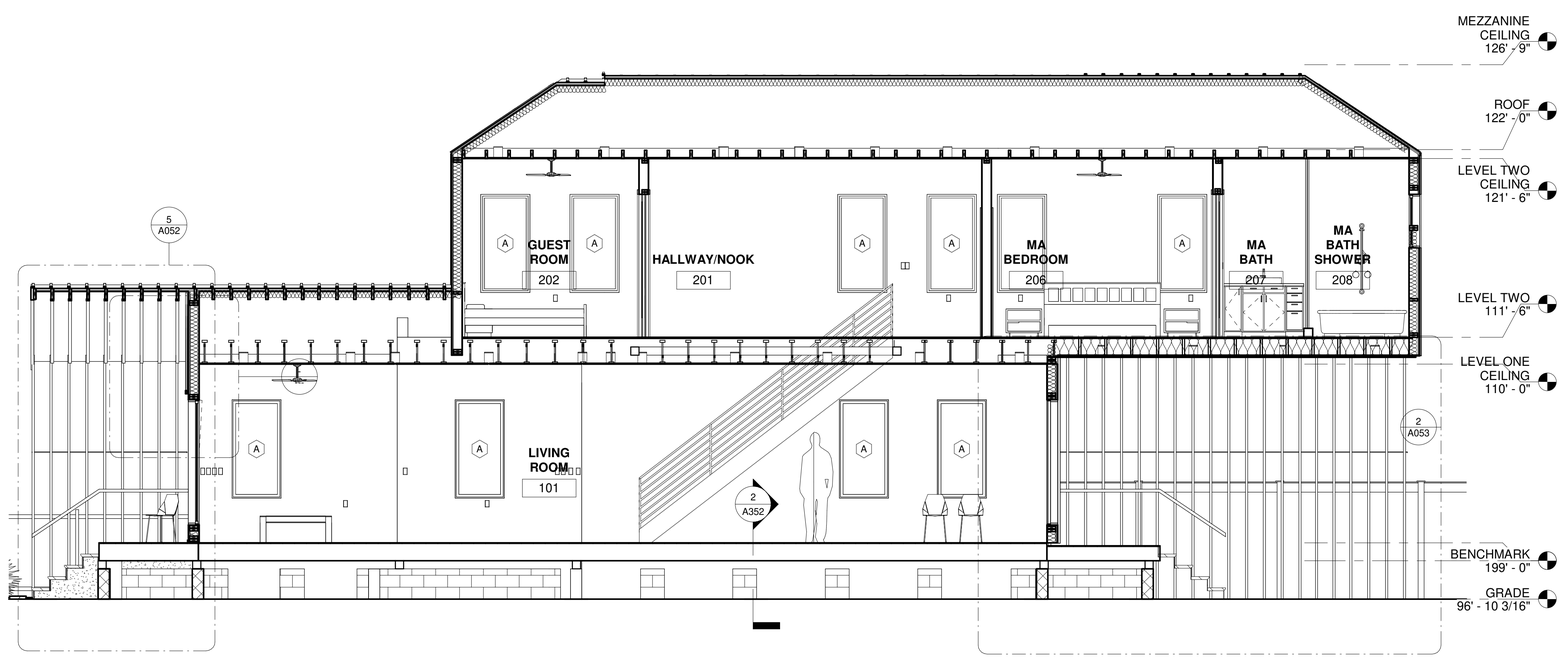

3 LONGITUDINAL SECTION _ 2
1/4" = 1'-0"

1/12/2025 10:54:44 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

BUILDING SECTIONS

2023.26

A301

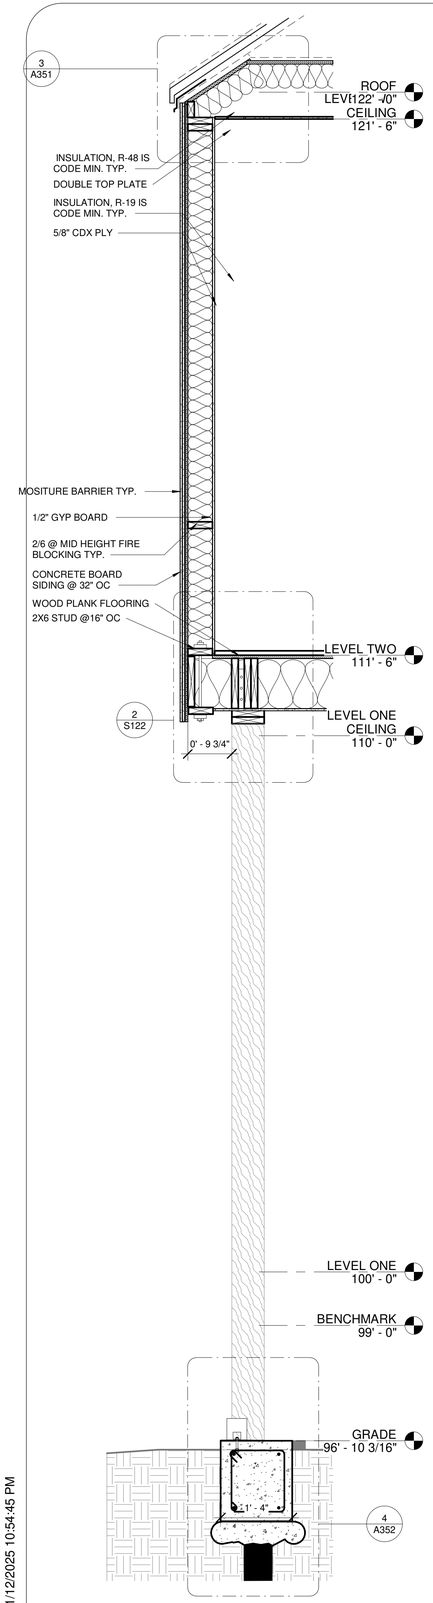

1 SECTION - WD COLUMN TO 2ND FLOOR
3/4" = 1'-0"

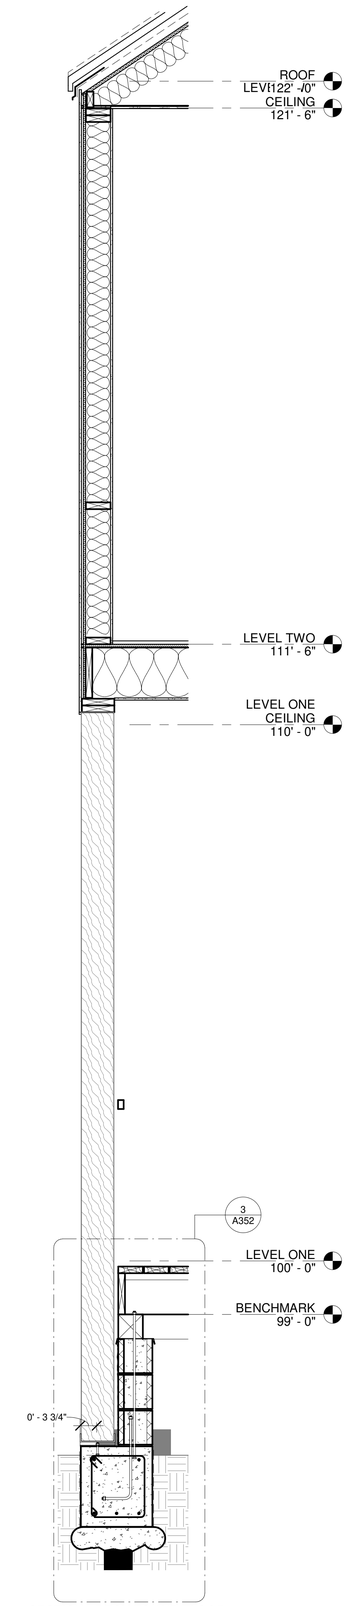

2 SECTION - DECK TO 2ND FLOOR
3/4" = 1'-0"

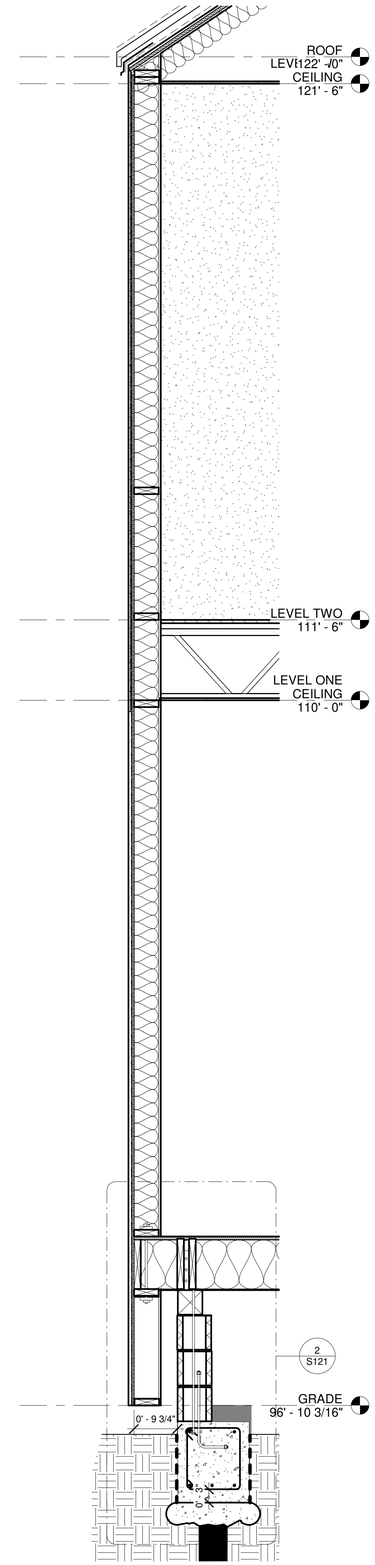

5 SECTION OVERHANGING SECTION
3/4" = 1'-0"

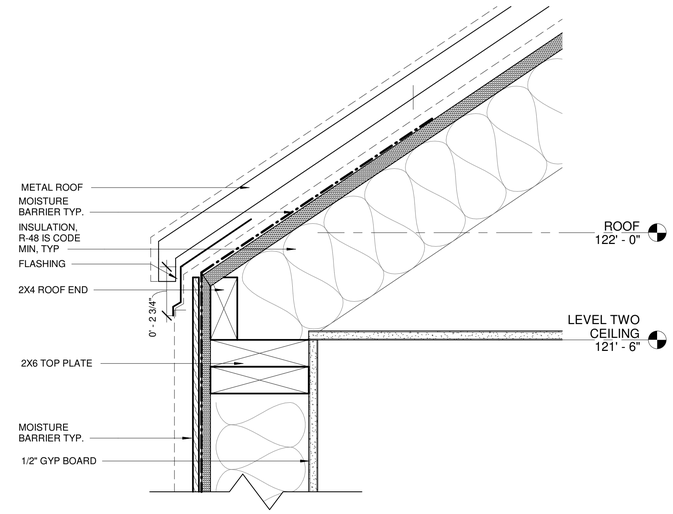

3 SECTION - ROOF/WALL CONNECTION
3" = 1'-0"

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

WALL SECTIONS

2023.26

A351

1/12/2025 10:54:45 PM

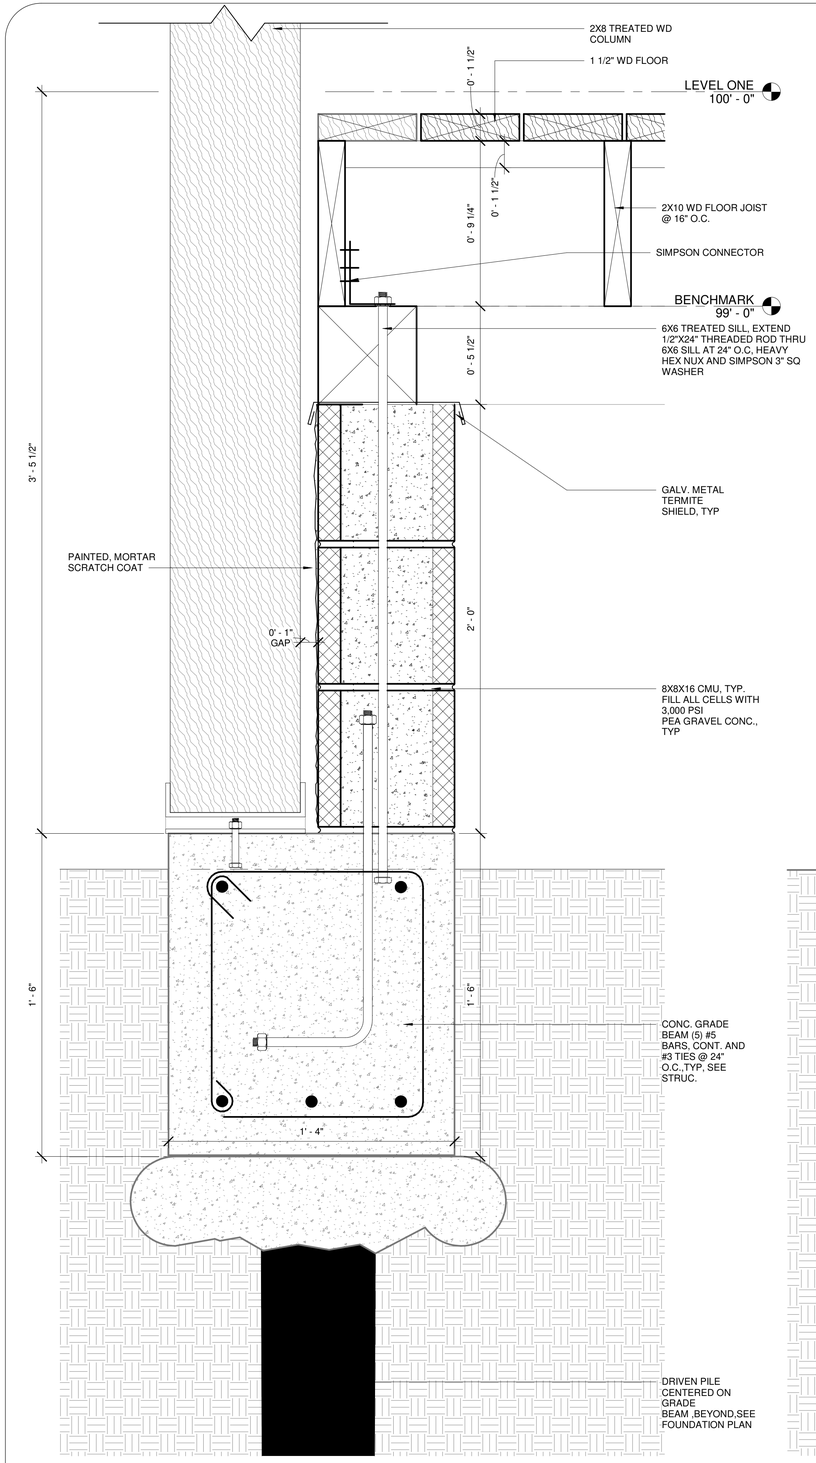

3 SECTION - PORCH & COLUMN DETAIL
3" = 1'-0"

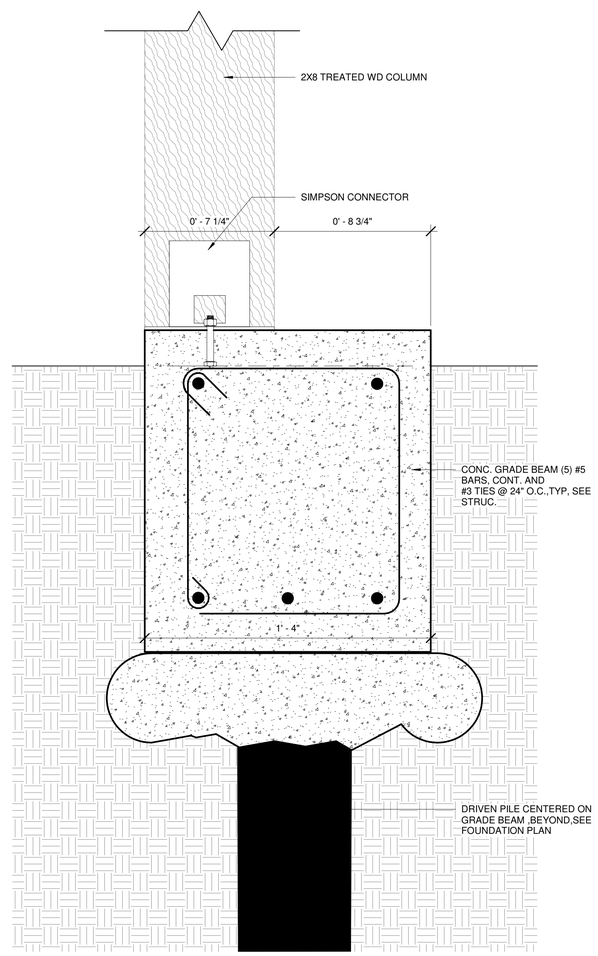

4 SECTION - WD COLUMN TO GRADE BEAM CONNECTION
3" = 1'-0"

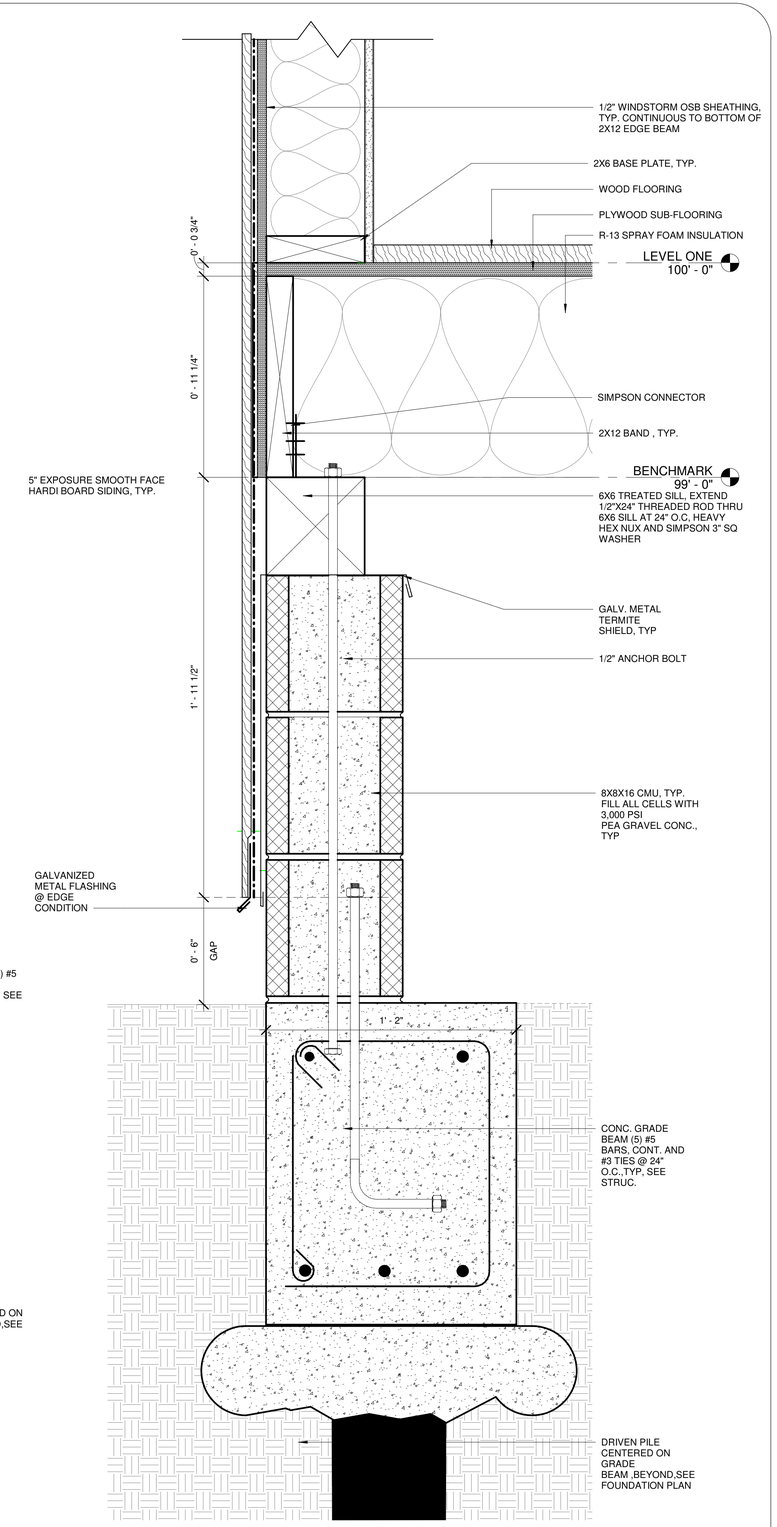

2 SECTION - SIDE WALL @ GRADE
3" = 1'-0"

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

WALL SECTIONS

2023.26

A352

1/12/2025 10:54:46 PM

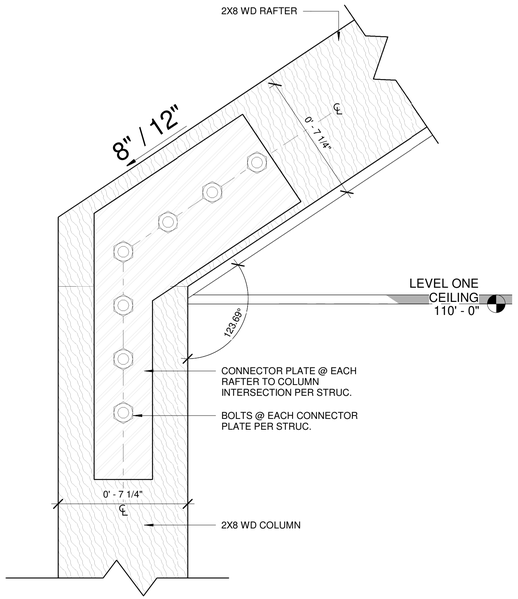

2 DETAIL - CONNECTOR PLATE @ WD COLUMN TO RAFTER CONNECTION
3" = 1'-0"

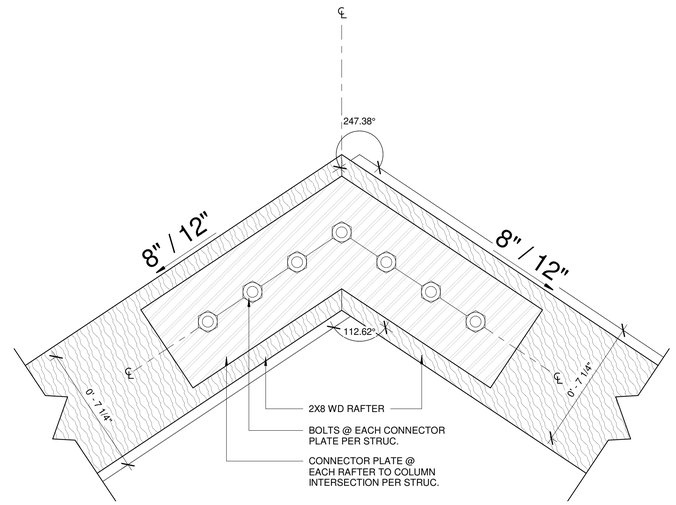

3 DETAIL - CONNECTOR PLATE @ WD RAFTER TO RAFTER CONNECTION
3" = 1'-0"

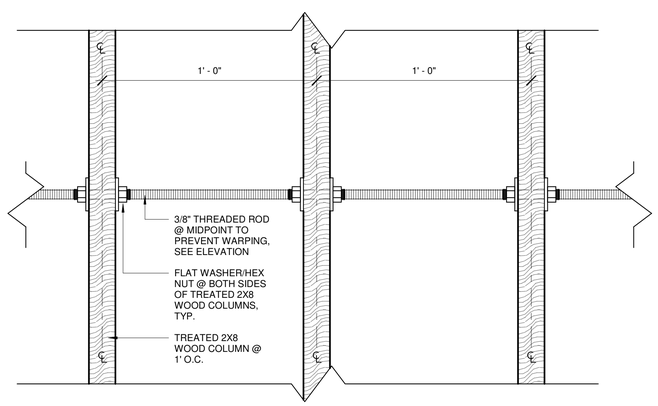

7 DETAIL - THREADED ROD @ WOOD COLUMNS
3" = 1'-0"

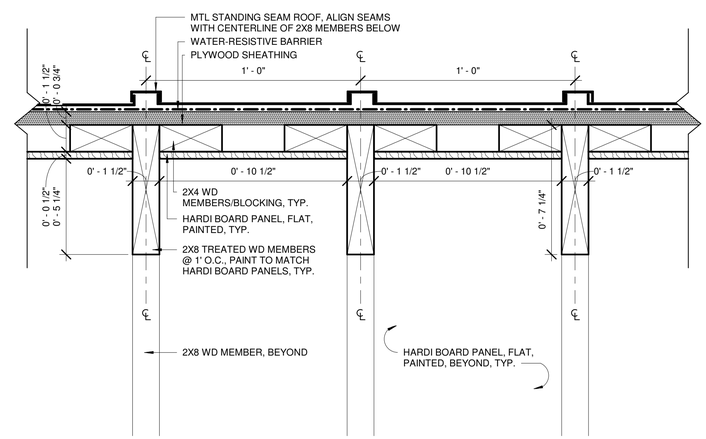

9 DETAIL - SOFFIT @ ENTRY
3" = 1'-0"

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

DETAILS - ENLARGED

2023.26

A353

1/12/2025 10:54:48 PM

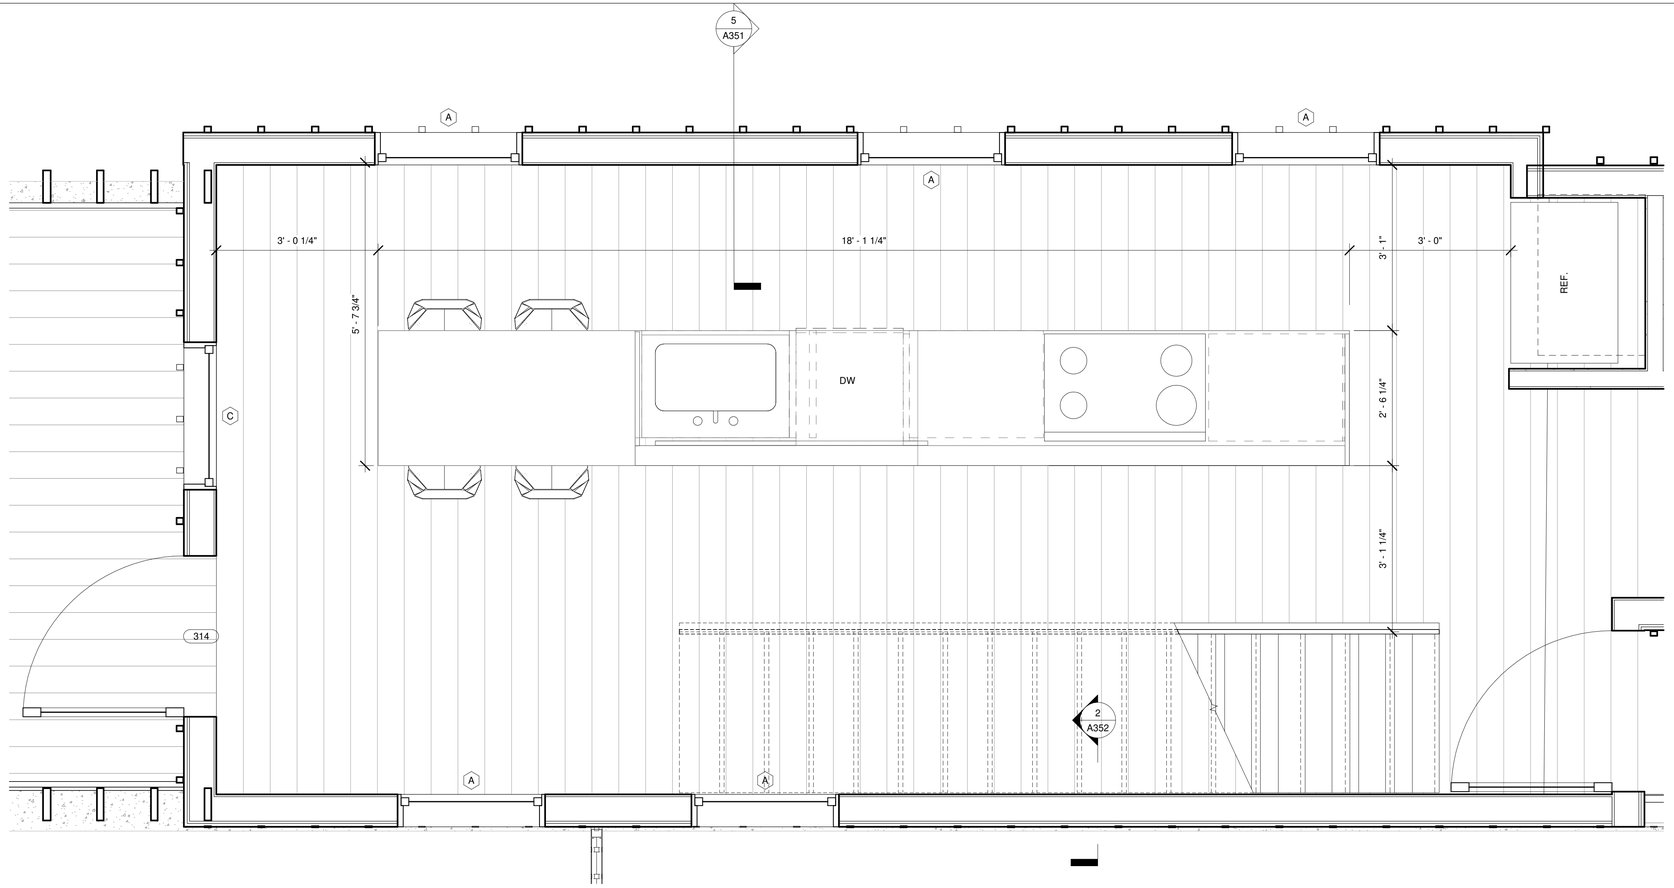

3 LEVEL ONE - Callout 1
3/4" = 1'-0"

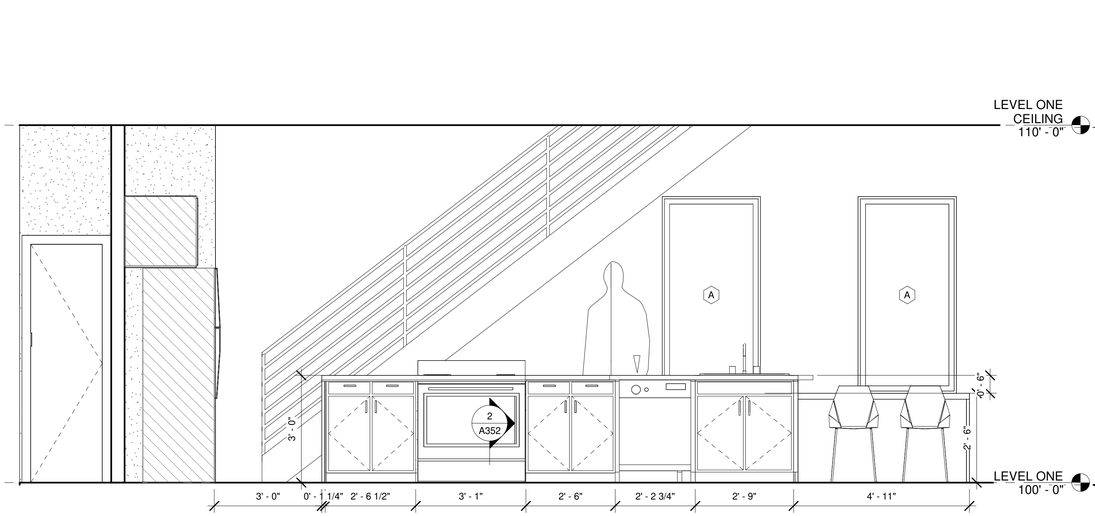

2 KITCHEN ELEVATION TWO
1/2" = 1'-0"

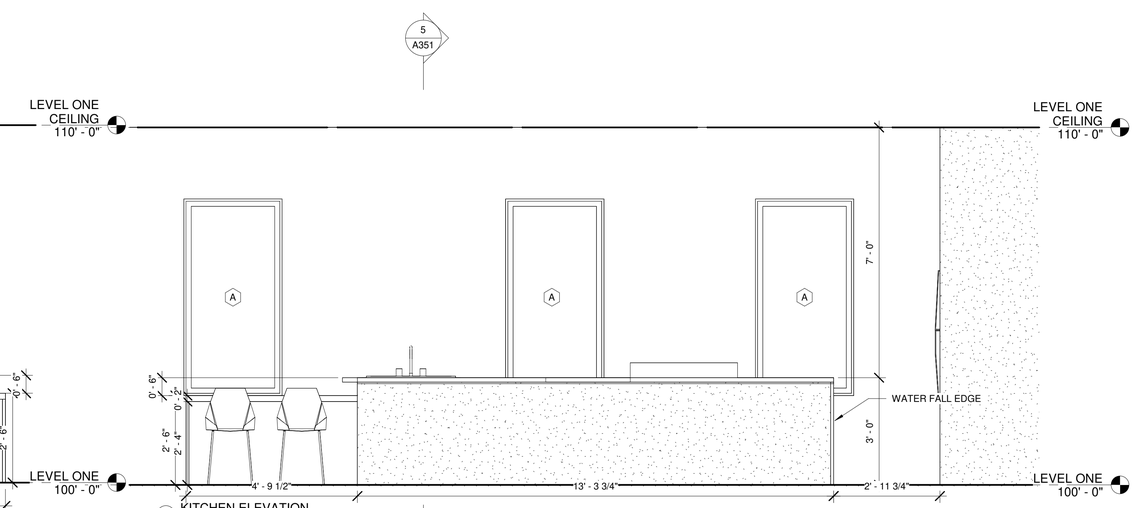

1 KITCHEN ELEVATION
1/2" = 1'-0"

1/12/2025 10:54:49 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

KITCHEN DETAILS

2023.26

A801



1 Window A
1/2" = 1'-0"



5 Section Window CC
1/2" = 1'-0"

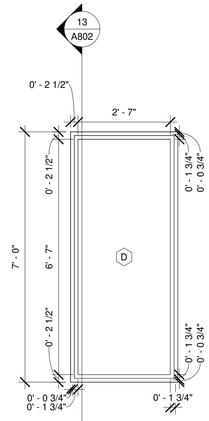

3 Elevation 4 - a
1/2" = 1'-0"



13 Section Window J
1/2" = 1'-0"



2 Window I
1/2" = 1'-0"



14 Section Window I
1/2" = 1'-0"



8 Window jjjj
1/2" = 1'-0"



7 Section Window jjjj
1/2" = 1'-0"



9 Window DD
1/2" = 1'-0"



12 Section Window D
1/2" = 1'-0"



10 Window Z
1/2" = 1'-0"



11 Section Window Z
1/2" = 1'-0"

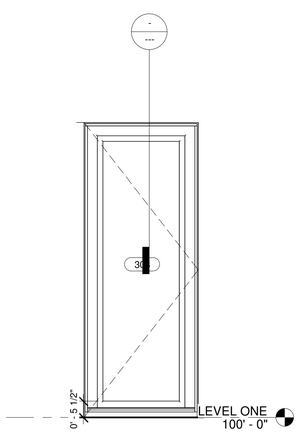

4 Elevation 3 - a
1/2" = 1'-0"

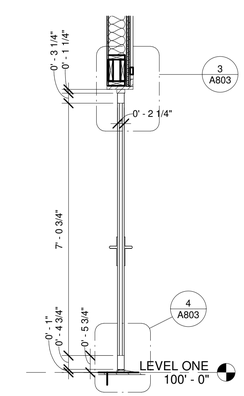

15 Section Door 220
1/2" = 1'-0"

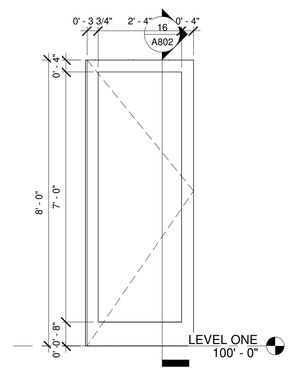

6 Elevation 6 - a
1/2" = 1'-0"

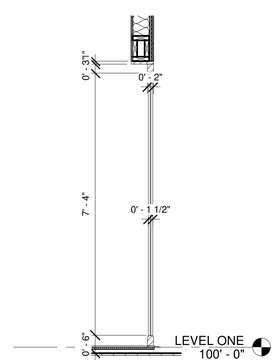

16 Section Door 274
1/2" = 1'-0"

Window Schedule

Type Mark	Width	Height	Count	Type Comments
A	2' - 9"	5' - 6"	13	CASEMENT. EGRESS.
B	2' - 9"	4' - 6"	2	Fixed
C	2' - 9"	7' - 0"	1	Fixed
D	3' - 0"	7' - 0"	2	Fixed
E	6' - 0"	3' - 0"	1	Fixed
F	4' - 6"	2' - 0"	2	Fixed

Door Schedule

Mark	Width	Height	Comments
202 A	2' - 10"	8' - 0"	Interior Door
204 A	2' - 10"	8' - 0"	Interior Door
206	3' - 0"	7' - 0"	Interior Door
207	2' - 10"	8' - 0"	Interior Door
210	2' - 0"	8' - 0"	Interior Door
217	2' - 0"	8' - 0"	Interior Door
308	3' - 0"	8' - 0"	Exterior Door Front
314	3' - 0"	8' - 0"	Interior Door
317	2' - 6"	8' - 0"	Exterior Door Back
318	3' - 0"	8' - 0"	Side Door
322	2' - 0"	6' - 8"	Interior Door

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

WINDOW & DOOR DETAILS

2023.26

A802

1/12/2025 10:54:51 PM

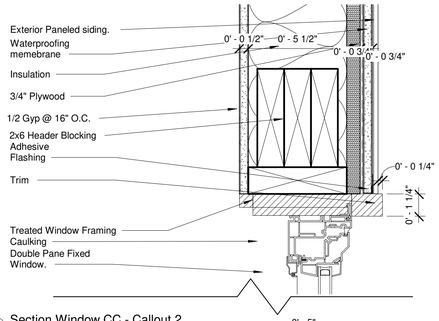

1 Section Window CC - Callout 2
3" = 1'-0"

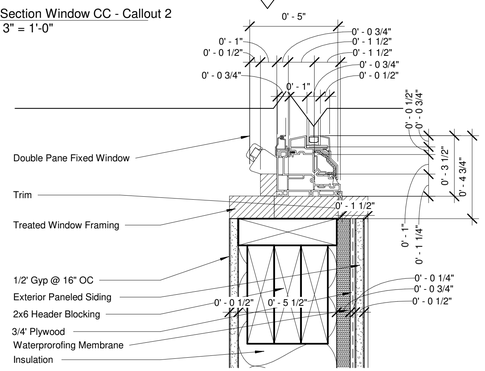

2 Section Window CC - Callout 1
3" = 1'-0"

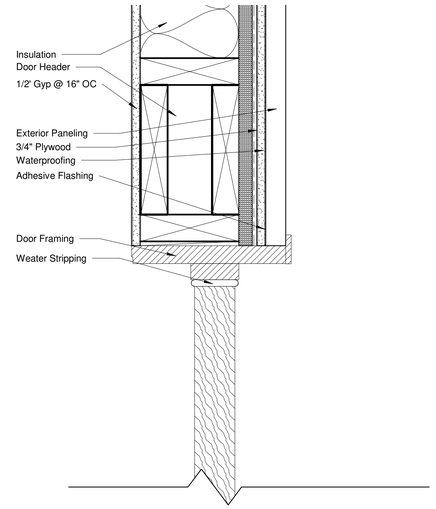

3 Section Door 220 - Callout 1
3" = 1'-0"

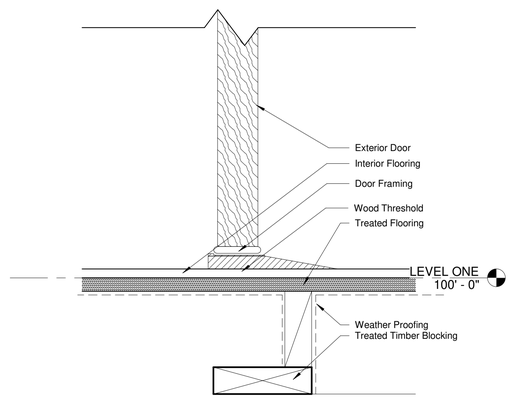

4 Section Door 220 - Callout 2
3" = 1'-0"

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

WINDOW & DOOR
- ENLARGED

2023.26

A803

1/12/2025 10:54:52 PM

1 VIEW FROM FRIDGE

2 HALLWAY VIEW TO KITCHEN

3 KITCHEN TOWARD LADDER

4 BACK LOOKING TOWARD THE FRONT

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

KITCHEN 3D VIEWS

2023.26

A804

1/12/2025 10:54:56 PM

2 EXTERIOR - REAR VIEW

4 EXTERIOR - STREET VIEW

6 EXTERIOR - REAR VIEW 2

5 EXTERIOR - FRONT

1/12/2025 10:55:03 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
1	CLIENT MEETING #1	2023.07.20
2	CLIENT MEETING #2	2023.08.15
3	HDLC ARC MEETING	2023.11.14
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

3D VIEWS - EXTERIOR

2023.26

A901

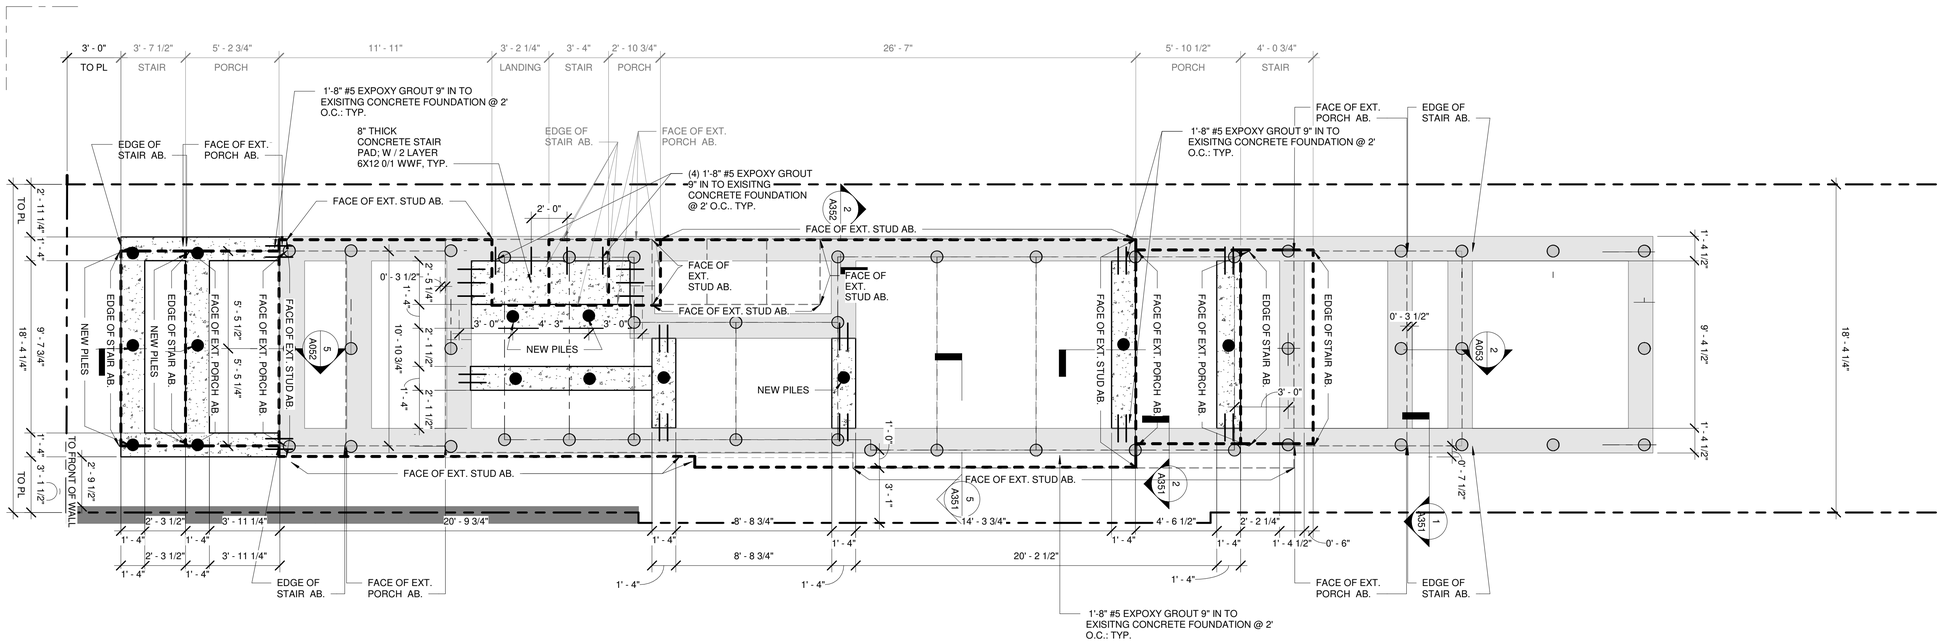

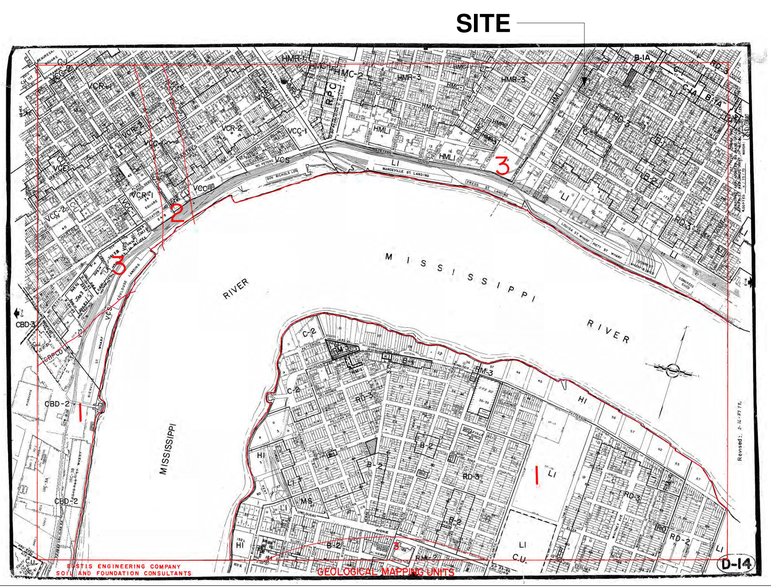

Map Index

Map Area	ANSI Pile Classification	Pile Tip Embedment (ft)	Single Pile Capacity (Compression) tons
Maximum Allowable Single Pile Load Capacity without Investigations or Load Tests (Table 1813.12.2.3)			
GM-1	Class 9	30'	4 ^
GM-21	Class 9	35'	5*
	Class 5	30'	5
	Class 5	35'	6
	Class 5	40'	8*
GM-2	Class 9	30'	4 ^
GM-5, GM-3(1,2, 3a,4,7)	Class 9	35'	5
	Class 5	30'	5
	Class 5	35'	6
	Class 5	40'	7
GM-3 (3b, 6, 8)	Class 9	30'	2.5 ^
GM-8, GM-9	Class 9	35'	3
GM-12, GM-16	Class 9	40'	4
GM-17, GM-18, GM-22	Class 5	30'	3
	Class 5	35'	4
	Class 5	40'	5
GM-4, GM-10	Class 9	18'-33'	5* ^ ♣
GM-11, GM-15	Class 5	18'-33'	8*♣
GM-6, GM-7	Class 9	10'-25'	5* ^ ♣
GM-13, GM-14	Class 5	10'-25'	8* ♣

NOTES:
* Pile tip embedded in sand stratum.
^ ANSI Class 9 piles to be used only for accessory buildings of 1,000 sq.ft. or less, or utility usage.
♣ The allowable capacity of these piles is governed by 1813.11.4 unless a site-specific geotechnical investigation recommends otherwise.

Areas not specifically covered in the above table or by the previously referenced maps shall require a geotechnical investigation.

● = NEW Class 5 30' pile
○ = EXISITNG Class 5 30' pile

FOUNDATION NOTES:

1) CONCRETE SHALL BE 3000 PSI AT 28 DAYS WITH 5" MAXIMUM SLUMP.

2) REINFORCING STEEL SHALL CONFORM TO A.S.T.M. A615 GRADE 60 SPECIFICATIONS. WELDED WIRE FABRIC (W.W.F.) SHALL CONFORM TO A.S.T.M. A185 REQUIREMENTS.

3) FOUNDATION SLAB SHALL BE 4" THICK WITH 6 X 12 0/1 W.W.F. REINFORCEMENT. PROVIDE 12" OVERLAP BETWEEN SHEETS OF W.W.F. WHERE REQUIRED.

4) GRADE BEAMS ARE 14" WIDE 18" DEEP WITH (5) #5 BARS CONT. WHERE NECESSARY LAPSLICE BARS WITH 28" LAPS. PROVIDE FOUR CORNER BARS AT ALL CORNERS. BARS SHALL HAVE 2" COVER ON GRADE BEAM SIDES AND 3" COVER GRADE BEAM BOTTOMS.

5) CHECK FLOOR PLAN AND SECTIONS FOR LOCATION OF ANCHOR BOLTS AND SLOPES, ETC. IN CASE OF CONFLICT, ARCHITECTURAL PLAN SHALL GOVERN.

6) REMOVE ALL VEGETATION, ROOTS, HUMUS AND TOP SOIL BELOW NEW FOUNDAITON. ALL FILL TO BE THOROUGHLY COMPACTED PUMPED RIVER SAND.

7) PROVIDE TERMITE TREATMENT PER CODE.

8) MAXIMUM SOIL BEARING PRESSURE = 600 PSF.

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

GRADE BEAM & PILE PLAN

2023.26

S101

1/12/2025 10:55:05 PM

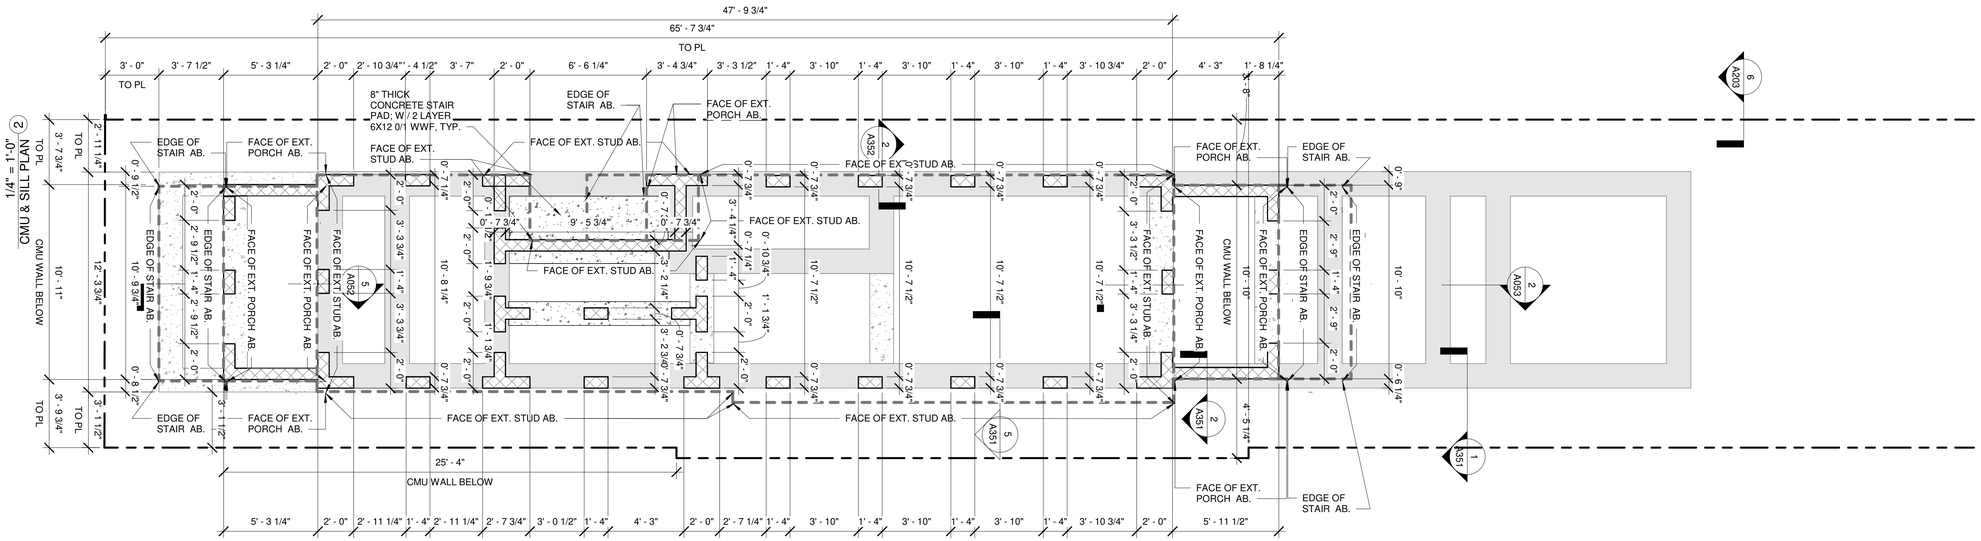

CMU & SILL PLAN 2
1" = 1'-0"

NOTE:
ALL PILES AT PRIMARY STRUCTURE TO BE CLASS 5 PILES
33' EMBEDMENT INTO NATURAL SOIL
ALL PILES AT CONCRETE SLABS TO BE CLASS 5

ANCHORAGE:
1. CONNECT PT SILL TO CMU WALL WITH 5/8" J-BOLTS @ 32" O.C.
1. CONNECT ALL BEAMS TO CMU WALLS WITH SIMPSON MSTAM36

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

CMU PLAN

2023.26

S102

1/12/2025 10:55:06 PM

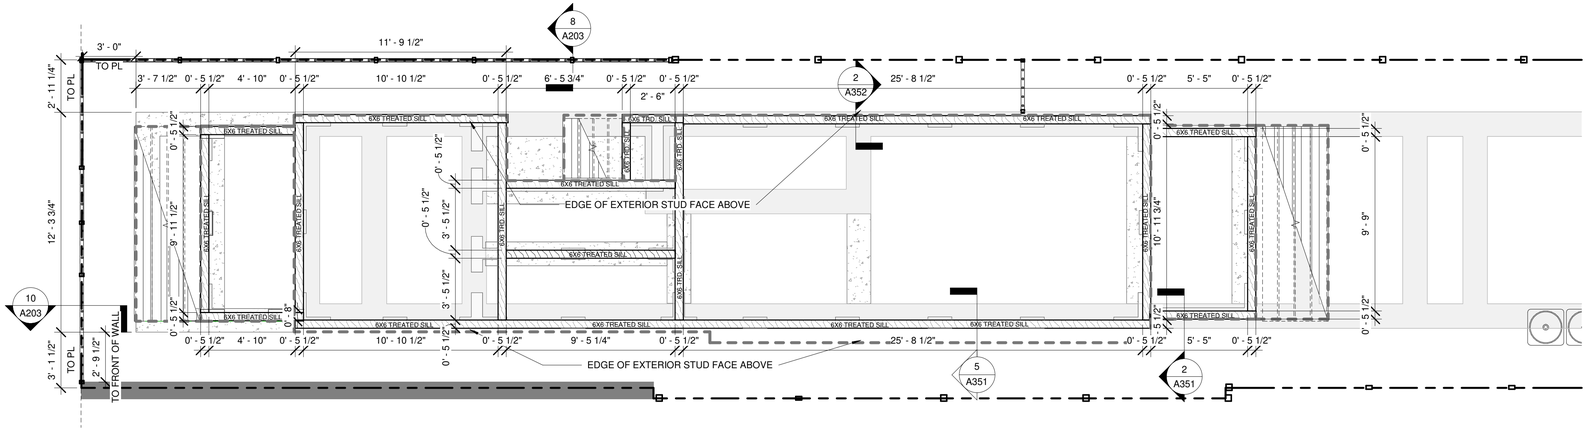

1 SILL PLAN
1/4" = 1'-0"

NOTE:
ALL PILES AT PRIMARY STRUCTURE TO BE CLASS 5 PILES
33' EMBEDMENT INTO NATURAL SOIL
ALL PILES AT CONCRETE SLABS TO BE CLASS 5

ANCHORAGE:
1. CONNECT PT SILL TO CMU WALL WITH 5/8" J-BOLTS @ 32" O.C.
1. CONNECT ALL BEAMS TO CMU WALLS WITH SIMPSON MSTAM36

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

SILL PLAN

2023.26

S103

1/12/2025 10:55:06 PM

FRAMING PLAN - LEVEL ONE
1/4" = 1'-0"
1

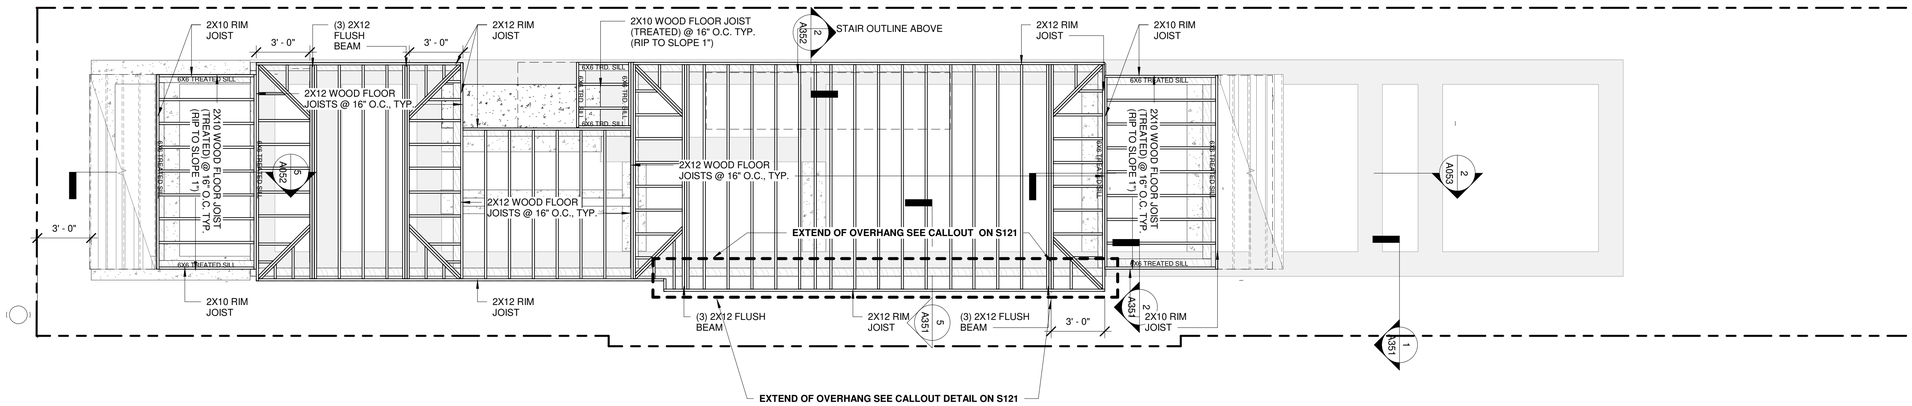

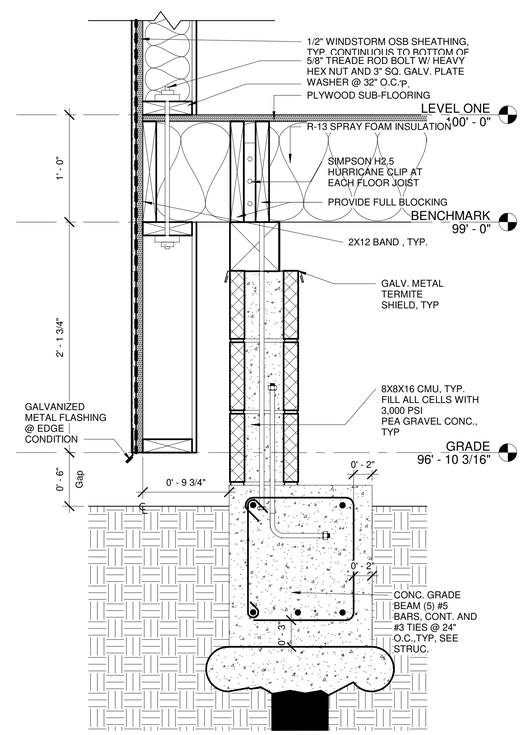

2 Section 4 - Callout 1
1 1/2" = 1'-0"

FRAMING NOTES:

1. PROVIDE DOUBLE JOISTS UNDER WALLS PARALLEL TO JOIST SPAN.
2. PROVIDE SOLID BLOCKING BELOW BEARING WALLS PERPENDICULAR TO JOIST SPAN.
3. PROVIDE ROWS OF BRIDGING 8'-0" O.C. (MAX.) FOR JOIST SPANS OVER 10'-0"
4. PROVIDE SOLID BLOCKING BELOW CLOUMNS.
5. PROVIDE SOLID BLOCKING OVER SUPPORTS.

WIND LOAD CONNECTORS

LOCATION	TYPE	LOADS	
RAFTERS TO TOP PLATE [2ND FLR CEILING]	SIMPSON H-1 EACH RAFTER	REQUIRED ALLOWABLE	XXX # XXX #
TOP PLATE TO STUDS [2ND FLR CEILING]	1/2" WINDSTORM O.S.B. W/ 2-ROWS 8D NAILS @ 5" O.C. STAGGERED	REQUIRED ALLOWABLE	XXX PLF XXX PLF
2ND STORY STUDS TO BAND JOIST [@ 1ST FLOOR CLG]	1/2" WINDSTORM O.S.B. 2 ROWS W/ 8D NAILS @ 5" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
BAND JOIST TO FIRST FLOOR STORY STUDS	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
1ST STORY STUDS TO 6X6 SILL	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
6X6 SILL TO FOUNDATION PIERS	1/2" THREADED ROD W/ 3" SQ WASHER @ EACH PIER	REQUIRED ALLOWABLE	XXX # XXX #
ROOF BEAM TO 6X6 COL @ PORCH	SIMPSON AC6 POST CAP	REQUIRED ALLOWABLE	XXX # XXX #
6X6 COLUMN @ PORCH TO CMU	SIMPSON ABU 66 EACH COLUMN	REQUIRED ALLOWABLE	XXX # XXX #

1/12/2025 10:55:07 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

FRAMING PLANS - LEVEL ONE

2023.26

S121

1/4" = 1'-0" (1)
FRAMING PLAN - LEVEL TWO

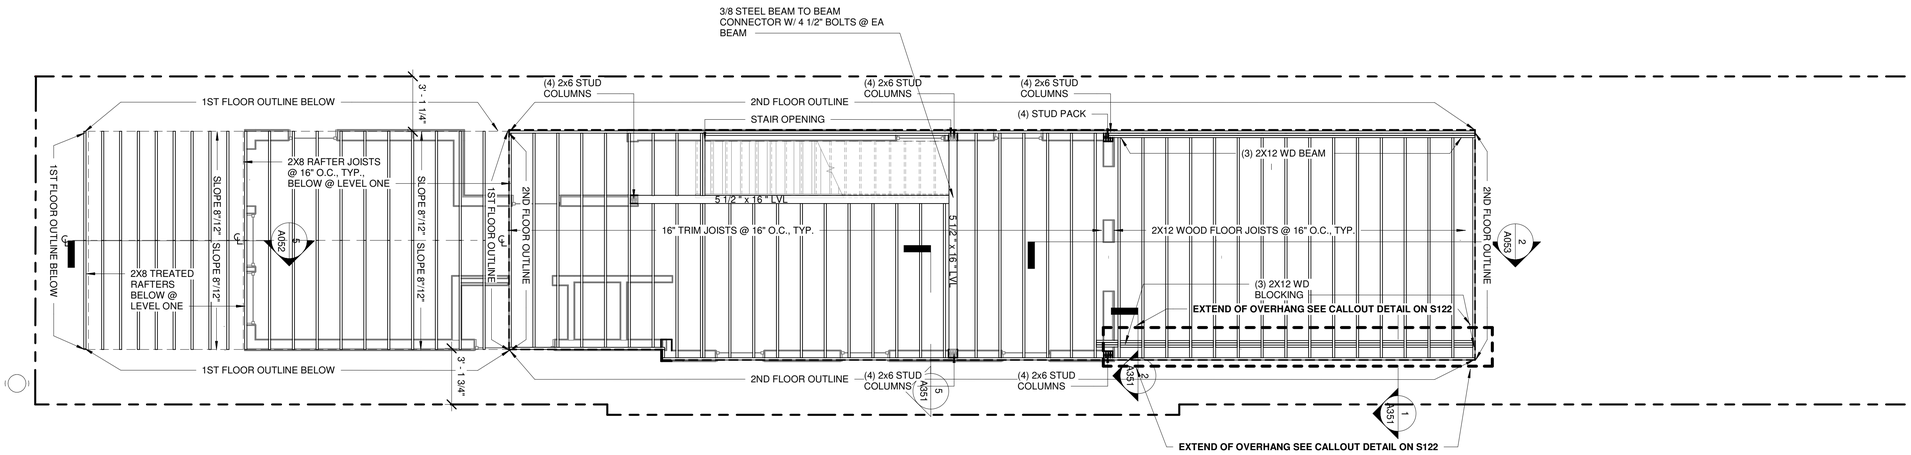

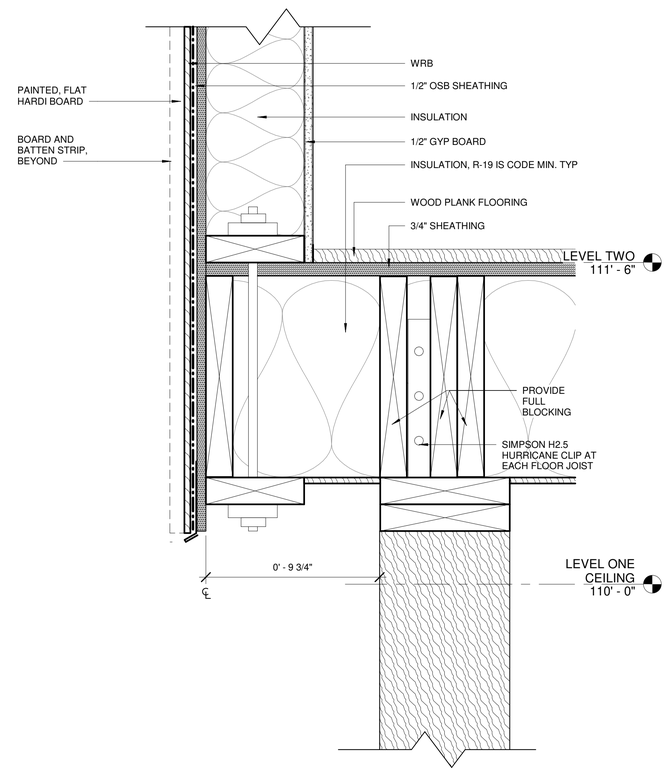

(2) SECTION - WALL/FLOOR/COLUMN CONNECTION
3" = 1'-0"

FRAMING NOTES:

1. PROVIDE DOUBLE JOISTS UNDER WALLS PARALLEL TO JOIST SPAN.
2. PROVIDE SOLID BLOCKING BELOW BEARING WALLS PERPENDICULAR TO JOIST SPAN.
3. PROVIDE ROWS OF BRIDGING 8'-0" O.C. (MAX.) FOR JOIST SPANS OVER 10'-0"
4. PROVIDE SOLID BLOCKING BELOW CLOUMNS.
5. PROVIDE SOLID BLOCKING OVER SUPPORTS.

WIND LOAD CONNECTORS

LOCATION	TYPE	LOADS	
RAFTERS TO TOP PLATE [2ND FLR CEILING]	SIMPSON H-1 EACH RAFTER	REQUIRED ALLOWABLE	XXX # XXX #
TOP PLATE TO STUDS [2ND FLR CEILING]	1/2" WINDSTORM O.S.B. W/ 2-ROWS 8D NAILS @ 5" O.C. STAGGERED	REQUIRED ALLOWABLE	XXX PLF XXX PLF
2ND STORY STUDS TO BAND JOIST [@ 1ST FLOOR CLG]	1/2" WINDSTORM O.S.B. 2 ROWS W/ 8D NAILS @ 5" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
BAND JOIST TO FIRST FLOOR STORY STUDS	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
1ST STORY STUDS TO 6X6 SILL	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
6X6 SILL TO FOUNDATION PIERS	1/2" THREADED ROD W/ 3" SQ WASHER @ EACH PIER	REQUIRED ALLOWABLE	XXX # XXX #
ROOF BEAM TO 6X6 COL @ PORCH	SIMPSON AC6 POST CAP	REQUIRED ALLOWABLE	XXX # XXX #
6X6 COLUMN @ PORCH TO CMU	SIMPSON ABU 66 EACH COLUMN	REQUIRED ALLOWABLE	XXX # XXX #

1/12/2025 10:55:07 PM

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

FRAMING PLANS - LEVEL TWO

2023.26

S122

1/12/2025 10:55:07 PM

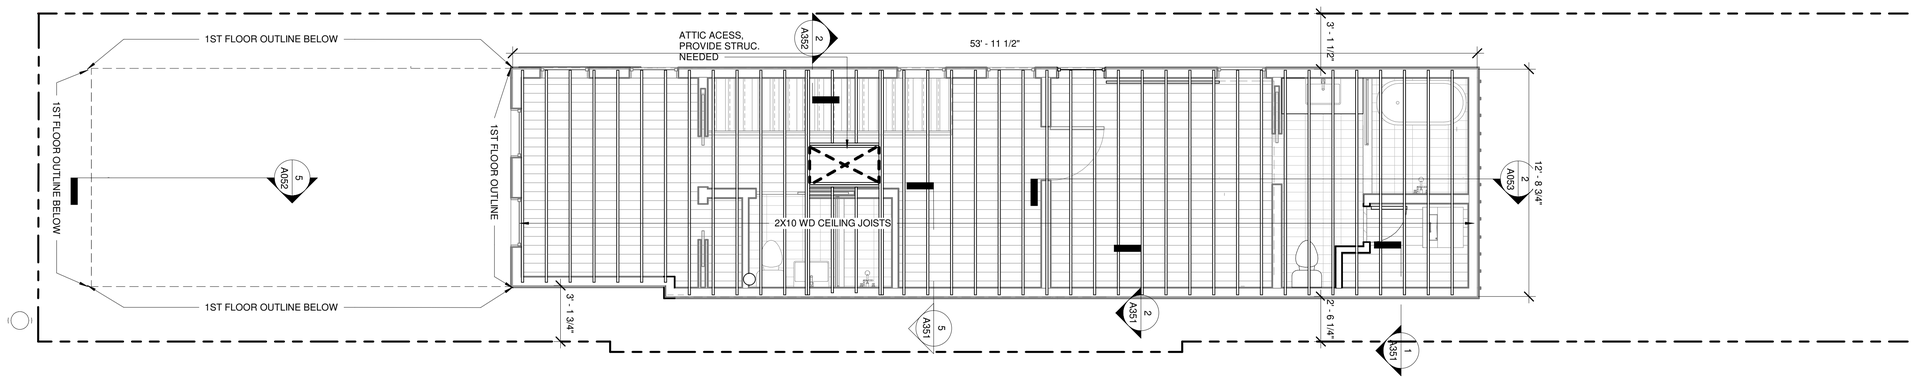

1 FRAMING PLAN - CEILING
1/4" = 1'-0"

FRAMING NOTES:

1. PROVIDE DOUBLE JOISTS UNDER WALLS PARALLEL TO JOIST SPAN.
2. PROVIDE SOLID BLOCKING BELOW BEARING WALLS PERPENDICULAR TO JOIST SPAN.
3. PROVIDE ROWS OF BRIDGING 8'-0" O.C. (MAX.) FOR JOIST SPANS OVER 10'-0"
4. PROVIDE SOLID BLOCKING BELOW CLOUMNS.
5. PROVIDE SOLID BLOCKING OVER SUPPORTS.

WIND LOAD CONNECTORS

LOCATION	TYPE	LOADS	
RAFTERS TO TOP PLATE [2ND FLR CEILING]	SIMPSON H-1 EACH RAFTER	REQUIRED ALLOWABLE	XXX # XXX #
TOP PLATE TO STUDS [2ND FLR CEILING]	1/2" WINDSTORM O.S.B. W/ 2-ROWS 8D NAILS @ 5" O.C. STAGGERED	REQUIRED ALLOWABLE	XXX PLF XXX PLF
2ND STORY STUDS TO BAND JOIST [@ 1ST FLOOR CLG]	1/2" WINDSTORM O.S.B. 2 ROWS W/ 8D NAILS @ 5" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
BAND JOIST TO FIRST FLOOR STORY STUDS	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
1ST STORY STUDS TO 6X6 SILL	1/2" WINDSTORM O.S.B. W/ 2 ROWS 8D NAILES @ 6" O.C.	REQUIRED ALLOWABLE	XXX PLF XXX PLF
6X6 SILL TO FOUNDATION PIERS	1/2" THREADED ROD W/ 3" SQ WASHER @ EACH PIER	REQUIRED ALLOWABLE	XXX # XXX #
ROOF BEAM TO 6X6 COL @ PORCH	SIMPSON AC6 POST CAP	REQUIRED ALLOWABLE	XXX # XXX #
6X6 COLUMN @ PORCH TO CMU	SIMPSON ABU 66 EACH COLUMN	REQUIRED ALLOWABLE	XXX # XXX #

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

FRAMING PLAN - CEILING

2023.26

S123

1/4" = 1'-0" (1)
LEVEL TWO

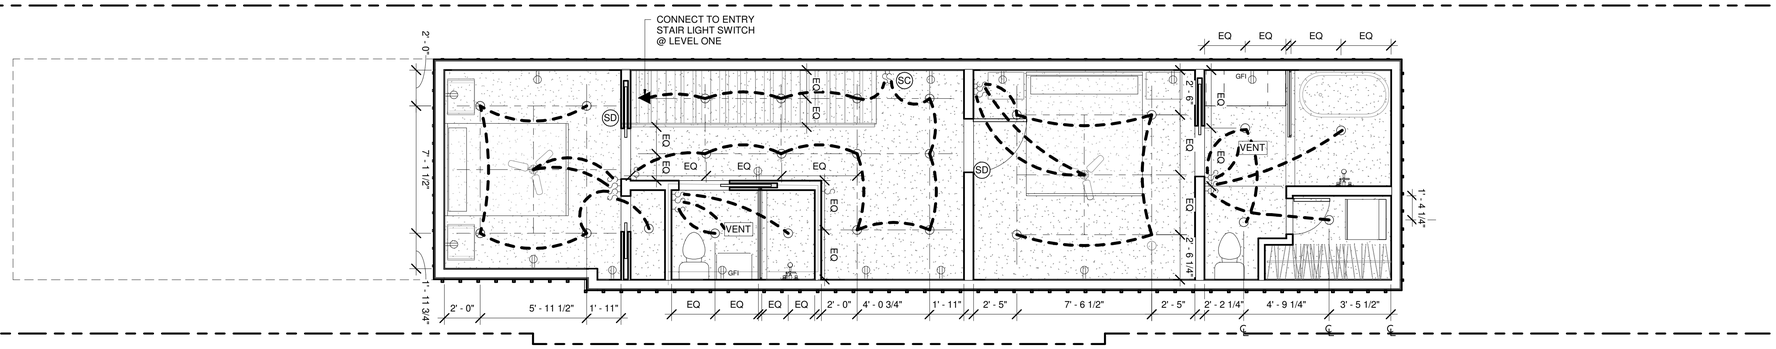

1/4" = 1'-0" (3)
ELECTRICAL - LEVEL ONE

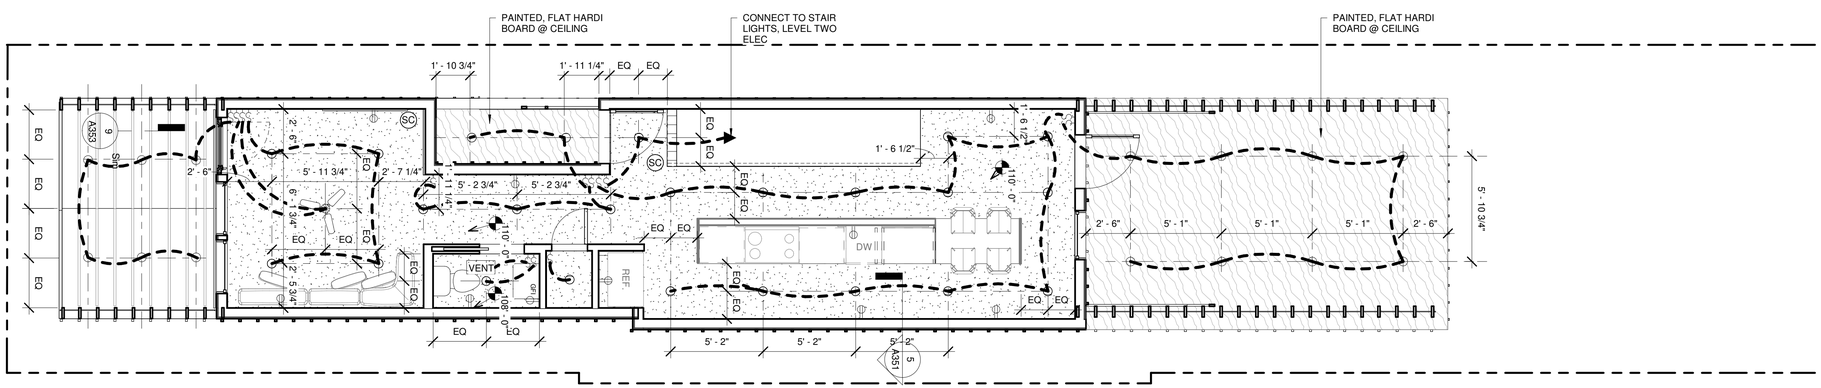

ELECTRICAL LEGEND

LIGHT FIXTURE	
RECESS LIGHT	R
FAN & LIGHT	
VENT & LIGHT	VENT LITE
HEATER/ VENT LIGHT	HLV
OUTLET	
SWITCH	S
110V SMOKE AND CARBON MONOXIDE DETECTOR W/ BATT. BACKUP ALL WIRED TOGETHER U.L.APPROVED	SC
110V SMOKE DETECTOR W/ BATT. BACKUP ALL WIRED TOGETHER U.L.APPROVED	SD
FLOOD LIGHT	

ALL WET AREA OUTLETS
ARE TO BE G.F.C.I. PROTECTED
ALL SLEEPING AREA OUTLETS
ARE TO BE ARC PROTECTED
AS PER CODE

225.202.8227 | frenchmarie10@gmail.com | New Orleans, LA
https://mariefrench.netlify.app/

No.	Description	Date
5	HDLC - COMMENT REVISIONS	2024.02.21
6	01 REVISIONS	2024.09.23
7	02 REVISIONS	2024.09.27

NEW CONSTRUCTION

BURGUNDY ST

ELECTRICAL
PLAN

2023.26

E101

1/12/2025 10:55:10 PM